

OF F I C E

More than 30 years of innovative lighting solutions for architecture. Whether office, retail or gallery, solutions made by Seeger are project-specific and creative. Directing attention, creating comfortable atmosphere, motivation and guidance; we develop holistic lighting solutions for your project – Seeger technical lights, Germany, www.seeger-licht.de

AR TEC TUR

This catalogue

This catalogue only has LED luminaires. Why? We believe the time has come for LED and that almost any lighting task can be solved with LED. We've decided to lay the foundations for the future, and what we began many years ago as pioneers now forms our concept: focusing entirely on the continual development and expansion of our LED luminaire portfolio. Continuous development in close cooperation with architects and lighting designers enables us to implement your lighting concept in a precisely focused way.

In this way we can respond quick an rapidly and flexibly to advances in LED technology, and continue to offer state-of-the-art luminaires for all requirements in the future as well.

Imprint

SEEGER KG
Technische Leuchten
Schwerter Straße 324
44287 Dortmund
Germany

Phone: +49 23192 72 52 00
Fax: +49 23192 72 52 10

info@seeger-licht.de
www.seeger-licht.de

VAT ID No.: DE 815 650 519
Tax No.: 315/5816/1906

District court Dortmund
(Local first-instance court)
Commercial Register No.: HRA 16 133

Contents

| | | |
|----------|----------------------|-----|
| Intro | Contents | 01 |
| | Company presentation | 04 |
| | Core expertise | 06 |
| Products | Downlights | 10 |
| | Recessed spotlights | 34 |
| | Strip lighting | 44 |
| | Profile luminaires | 84 |
| | Office luminaires | 110 |
| | Lightrings | 126 |
| Appendix | Article number index | 140 |
| | Terms and conditions | 142 |
| | Article number code | 144 |

O

F

F

A

Z

A

R

C

E

C

T

I

C

E

D

H

I

T

U

R

E

TIMELINE

Foundation of the company "Seeger Licht- und Leuchten" wholesale business in Dortmund, Germany as a specialist wholesale dealer with lighting design.

Warehouse and production space expanded to 3000 m².

1984

2000-07

1992

Rebranded to "Seeger technische Leuchten".
Manufacturing location moves to Ring-
ofenstraße, Dortmund-Aplerbeck. Produc-
tion and development above 1500 m².

Launching of LED technology.
Development and construction of LED-
based luminaires.

2008

2006

Name changed to "Seeger technische
Leuchten e. K."

2015

Relocation to new office and production
building in Hildebrandstraße, Dortmund.
New ergonomic and ESD-protected
production line. Expansion of
development- and control department.

A globe is centered in the image, with various technical and business terms written in bold, black, sans-serif capital letters around it. The text is arranged in a circular pattern, following the curvature of the globe. The terms include: ENGINEERING, LIGHTING DESIGN, SALES CONSULTING, DEVELOPMENT OF LENS, ELECTRONICS DEVELOPMENT, SHEET METAL WORKING, QUALITY MANAGEMENT, PROJECT MANAGEMENT, and PRODUCT DESIGN.

ENGINEERING
LIGHTING DESIGN
SALES CONSULTING
DEVELOPMENT OF LENS
ELECTRONICS DEVELOPMENT
SHEET METAL WORKING
QUALITY MANAGEMENT
PROJECT MANAGEMENT
PRODUCT DESIGN



CURIOSITY IDEALISM
COMMUNICATION SKILLS
OR INNOVATION LIGHTING TE
REFERENCE FOR TECHNICAL DE
ATEGIC VISION FOR SUSTAINA
ATIONS ON HIGH-PERFORM
FLEXIBILITY AUTHENT

OUR CORE EXPERTISE

We plan your projects hand-in-hand with architects. With our continuous contact to lighting designers and customers we create your project-specific lighting solutions. Constructional framework conditions, interior designs and utilisation profiles flow into optimum planning solutions in tight cooperation with our customers. Trained employees, supported with state-of-the-art software and hardware, ensure realistic visualisations and rapid response times with any necessary modifications. In addition to continuously improving our existing assortment, our construction department also develops project-specific custom solutions.

Our in-house production facilities are also able to rapidly produce prototypes and samples from drawings. In this way we respond flexibly to customer wishes and complex applications as determined by the lighting design.

Company production workshops have a total area of 1,300 m². Trained personnel and state-of-the-art equipment provide high levels of care and safety. We guarantee high quality "Made in Germany" thanks to use of selected materials sourced from German suppliers.




Wilhelmshöhe Theater, Lingen









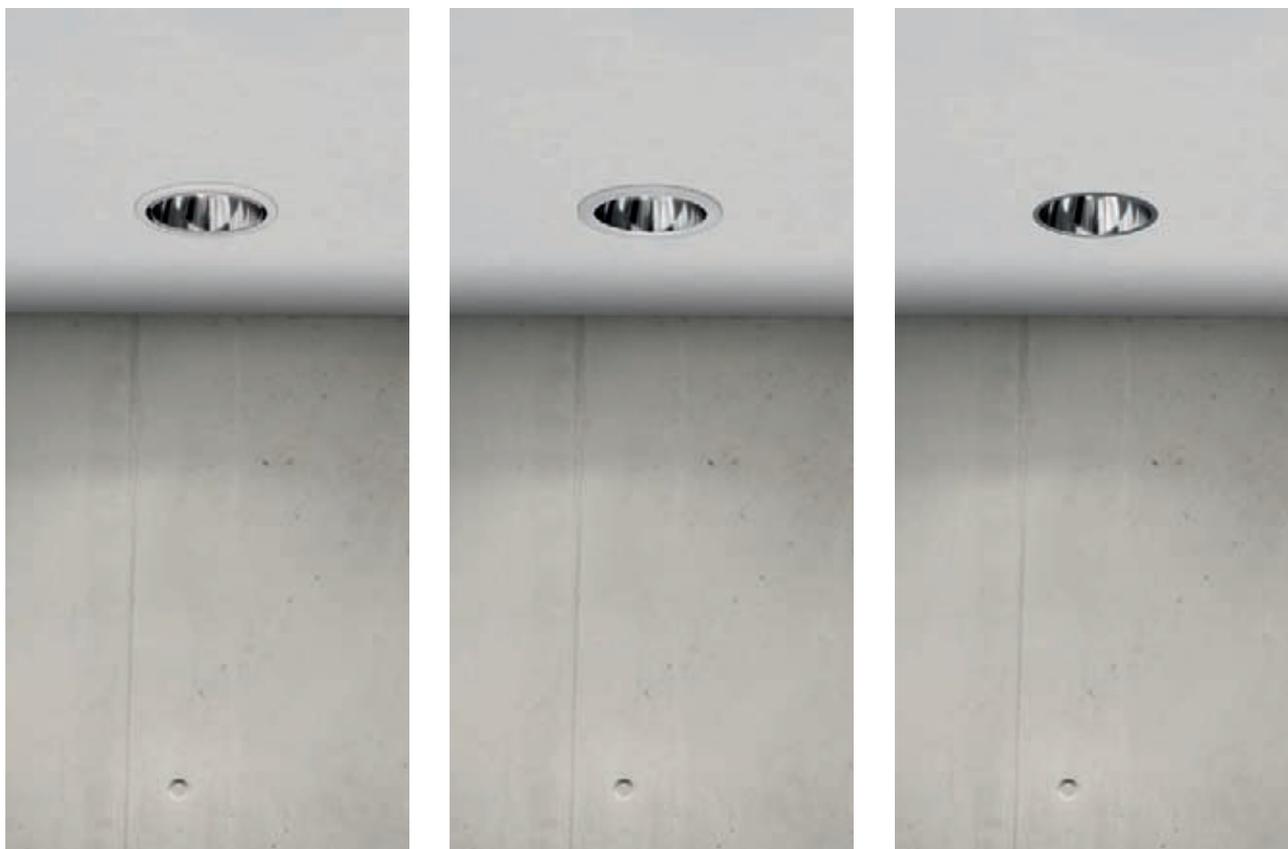

Luminaire covers

To meet various design requirements, three different luminaire conclusions are available for recessed downlights. These are based on a particularly narrow **standard ring** with a recessed reflector.

The **Changing ring system** consisting of an easy-to-assemble base ring can be adapted to many different multifunctional accessories (see from page 28).

► To order the changing ring system please add "CR" to the order code.

A special highlight is the plastered-in installation of luminaires. Our **trimless system** enables discreet, ceiling-flush or slightly recessed luminaire mounting. This requires a separately ordered plastering frame.

► To order the Trimless System please add "TR" to the order code.


Standard Ring

Narrow luminaire conclusion ring in one piece. Discreetly recessed reflector rim.



Changing Cover Ring

Changing ring system in 2 parts where the luminaire is delivered with a fixed ring. One separate cover ring is fastened by a bayonet lock.

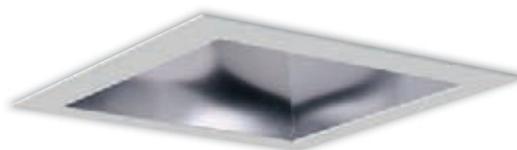

► Please add **CR** to the order code.

Trimless System

The plastering frame is covered by the reflector edge. The reflector edge is either flush with the ceiling or recessed.



► Please add **TR** to the order code.




Trimless Mounting System

The Trimless mounting system is used if the downlights should be an integral component of the architecture. The system perfects this contemporary design concept thanks to its completely frameless luminaire mounting.

The Trimless system features optimised versions for various ceiling systems and on-site situations. This ensures that architectural design concepts can be implemented without technical problems.



► The trimless installation in cast concrete ceilings can be realised using specially developed cast-in housings. The use of a variable core element means this is also possible with bare concrete ceilings.

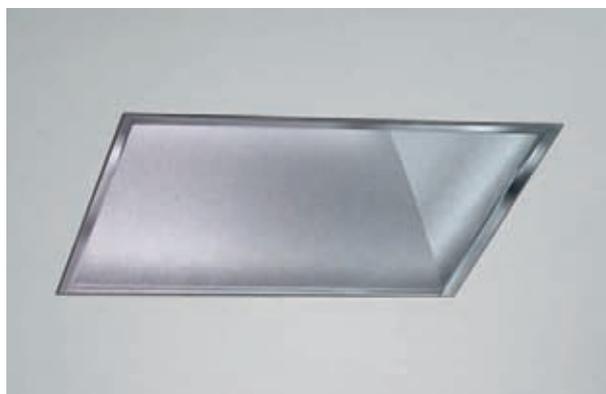

Trimless, flush

The plastering frame is covered by the lip of the reflector. The reflector edge sits in a slight recess and finishes flush with the ceiling.

Trimless, recessed

Edgeless installation using a plastering frame with a mounting sleeve. This sleeve is plastered over and painted in the final ceiling colour on-site.

Plaster mounting

Luminaire adapted to suit the ceiling system using a separate mounting frame. Optionally for flush installation or recessed installation. The plastering frame is fixed in the ceiling cut-out that was produced on-site and is secured using drywall screws. Fitting to the ceiling system is performed on-site. Luminaire housing for subsequent installation into finished ceiling.


► The optional changing frame is not normally included, please order separately.



Mounting module with plastering edge



Securing and plastering



Painting



Installing the downlight



Trimless Luminaire System

Installed flush with the ceiling or even recessed into it without any visible edge, these luminaires recede into the background, simply leaving discreet ceiling openings identifiable as the source of light. The exact lu-


minaire detail and the necessary accessories have been optimised and adapted to suit the respective on-site situation as dictated by the building.



Concrete housing

The use of concrete housings allows recessed-mounted luminaires to be harmoniously integrated into the ceiling. Special adaptations also enable specific stress requirements to be met. This includes extended concrete inlets up to a maximum of 35mm in order to guide the armouring underneath the fitting. Flat or round fittings (with highly reduced volume) are available,

depending on the ceiling situation. If round concrete castings are used, only specially adapted downlights can be used.

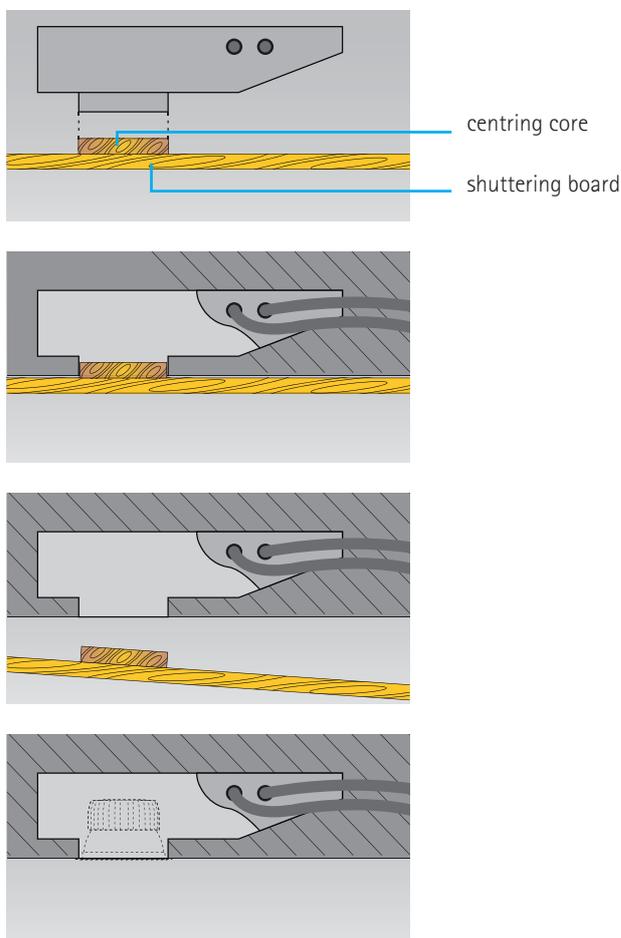

Concrete housing

The use of concrete housings allows recessed-mounted luminaires to be harmoniously integrated into the ceiling. Special adaptations also enable specific stress requirements to be met. This includes extended concrete inlets.

Specification

Sturdy one-piece housing made of galvanized sheet steel with a slanted concrete run. 2 to 4 entries for conduit. Attached throat can be extended as required. Maximum height 35mm. Fixing tabs for nail fastening to the wooden formwork. When installing in bare concrete ceilings, fixing with internal centring discs must be provided. Please order separately.



► Concrete Housing, Flat

article No. 0898.xxxx (xxxx = luminaire Article no.) Can be used for standard downlights. Suitable for concrete ceilings and, where centring plates are used, suitable for fair-faced concrete ceilings.



► Concrete housing with polystyrene hard foam centring core for recessed installation (see figure, p.16)

Integration into any system




Integration into any system

Differing ceiling systems require different mounting solutions. For integrative installation into strip ceilings we offer the possibility of mounting the desired downlight discreetly into the existing system – whether this is a round or angular construction.

Almost any type of existing ceiling system can be used without major effort. We would be pleased to inform you about technical details and specifications following a brief consultation.

Add-on modular plate




Before ordering please consult us for technical details.

Modular Panels

The integration of recessed luminaires into M100 panel ceilings is made possible with modular panels. (Other ceiling systems available on request.) The modular panels are mounted into the ceiling construction without tools. The downlight is subsequently mounted into the ceiling section. When using the add-on modular panels the luminaire ring is replaced by this modular panel. The luminaire cover ring therefore becomes redundant.

Frame for semi-recessed mounting






Semi-recessed mounting is only possible with changing cover ring system.


Semi-Recessing Frame

Reduction of recessing height due to semi-recessing frame up to 40mm possible. Project-related supply of appropriate tilting adaptors for recessed luminaires in slant ceilings is possible.

Modular plate for panel ceilings



3-field 2-field

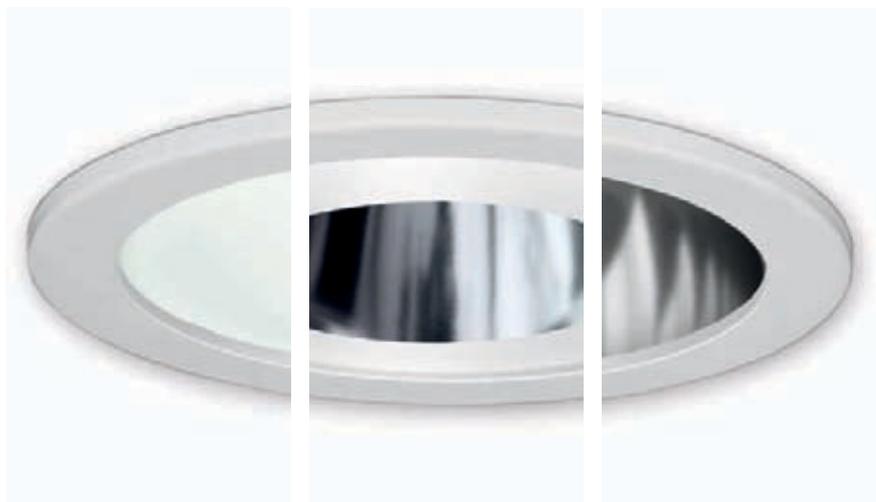

Perfect light – perfect protection

In certain applications, electronic components must be specifically protected. Our glass inserts provide this protection. All glass inserts feature increased splash water protection. When installed in closed ceiling systems, luminaires with permanently bonded glass covers attain protection mode IP 43 from below.

protection pane, clear



protection pane, satin-frosted



protection pane, partially frosted in centre



protection pane, partially frosted at edge



Safety first

Safety lighting

Independent luminaire inserts for emergency and safety lighting can be implemented in the downlights. Integration is with or without single battery in non-maintained operation. The wide spectrum of system elements covers various solutions for emergency lighting in case of mains failure, as well as safety markings for designating escape paths in maintained operation and directive luminaires. The simple inspection possibility of supplementary elements makes use of single batteries highly simple.



LED Emergency Module

Specific components such as monitoring modules, AC/DC switching points, address modules and individual batteries can be integrated for the emergency lighting function.



Emergency lighting unit:
Single battery with control LED



Monitoring component



Change-over relays



Emergency lighting installations are specified in many public buildings and places of work. Reliable orientation must always be ensured even in the case of power failures. Emergency luminaires and escape sign luminaires also provide the preconditions for

reliably designating escape paths in emergencies. They also facilitate access to fire-fighting equipment and protection systems. This may prevent panic and rescue human life.



Charge monitoring

The charge control lights up upon connection to the power network. The integrated emergency light battery is correctly charged. The multi-level charging system enables charging behaviour matched to the battery. The three methods of charging (initialisation charging, rapid charging and maintenance charging) are activated automatically.

Normal operation

The downlight is switched on and the charge control lights up. The battery is also continuously charged in normal operation.

Emergency light supply

The specified functional test is implemented directly on the luminaire without tools at the freely accessible push-button.



Rescue signs and guidance signs

Additional signs can be easily integrated in continuous circuits or into reference luminaires by using optical lighting accessories.

Choose your design!





► **Downlight with optical system**

The optic of the DIFFUS LED consists of an acrylic glass diffuser on the room side for the diffuse light component and a parabolic reflector for high luminance levels below the luminaire.

CR with IP 43

Protection pane, clear partially frosted at edge, protected against spraying water.




Round LED downlights



Round LED downlights

- › luminaire housing made of aluminium and steel
- › visible parts available powder-coated in accordance with RAL
- › aluminium reflector (Al99.99), highly polished
- › passive cooling system
- › LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 81
- › Mid Flux LED type 82
- › High Flux LED type 83
- › Ultra Flux LED type 84
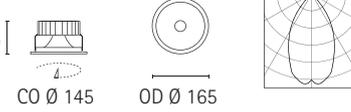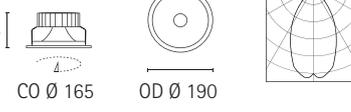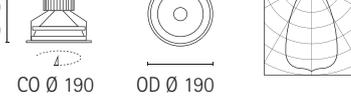
| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
| RD 120  CO Ø 145 OD Ø 165 | 12130 | 81 | 1470 lm | 1580 lm | 1610 lm | 1640 lm | 15 W |
| | | 82 | 2050 lm | 2210 lm | 2250 lm | 2290 lm | 20 W |
| | | 83 | 2810 lm | 3020 lm | 3070 lm | 3150 lm | 25 W |
| | | 84 | 3520 lm | 3800 lm | 3870 lm | 3950 lm | 35 W |
| RD 140  CO Ø 165 OD Ø 190 | 12140 | 81 | 1480 lm | 1590 lm | 1620 lm | 1650 lm | 15 W |
| | | 82 | 2060 lm | 2230 lm | 2270 lm | 2310 lm | 20 W |
| | | 83 | 2820 lm | 3040 lm | 3090 lm | 3160 lm | 25 W |
| | | 84 | 3540 lm | 3810 lm | 3890 lm | 3960 lm | 35 W |
| RD 135 RD 140  CO Ø 195 OD Ø 220 | 12150 | 81 | 1530 lm | 1650 lm | 1680 lm | 1710 lm | 15 W |
| | | 82 | 2140 lm | 2310 lm | 2350 lm | 2400 lm | 20 W |
| | | 83 | 2930 lm | 3160 lm | 3210 lm | 3280 lm | 25 W |
| | | 84 | 3680 lm | 3960 lm | 4040 lm | 4120 lm | 35 W |
| RD 125  CO Ø 145 OD Ø 165 | 12830 | 81 | 1700 lm | 1830 lm | 1860 lm | 1900 lm | 15 W |
| | | 82 | 2370 lm | 2560 lm | 2610 lm | 2660 lm | 20 W |
| | | 83 | 3240 lm | 3490 lm | 3550 lm | 3630 lm | 25 W |
| | | 84 | 4070 lm | 4380 lm | 4470 lm | 4550 lm | 35 W |
| RD 125  CO Ø 165 OD Ø 190 | 12840 | 81 | 1700 lm | 1830 lm | 1860 lm | 1900 lm | 15 W |
| | | 82 | 2370 lm | 2560 lm | 2610 lm | 2660 lm | 20 W |
| | | 83 | 3240 lm | 3490 lm | 3550 lm | 3630 lm | 25 W |
| | | 84 | 4070 lm | 4380 lm | 4470 lm | 4550 lm | 35 W |
| RD 140 RD 170  CO Ø 190 OD Ø 190 | 12100 | 81 | 1120 lm | 1200 lm | 1220 lm | 1250 lm | 15 W |
| | | 82 | 1560 lm | 1680 lm | 1710 lm | 1750 lm | 20 W |
| | | 83 | 2130 lm | 2300 lm | 2340 lm | 2390 lm | 25 W |
| | | 84 | 2680 lm | 2890 lm | 2940 lm | 3000 lm | 35 W |

Technical changes reserved and errors excepted!






Square LED downlights



Square LED downlights

- › luminaire housing made of aluminium and steel
- › visible parts available powder-coated in accordance with RAL
- › aluminium reflector (Al99.99), highly polished
- › passive cooling system
- › LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 81
- › Mid Flux LED type 82
- › High Flux LED type 83
- › Ultra Flux LED type 84
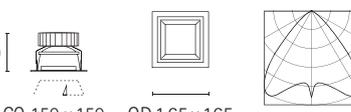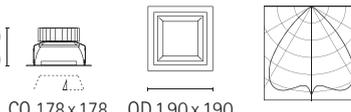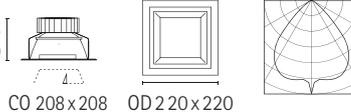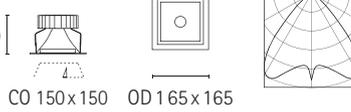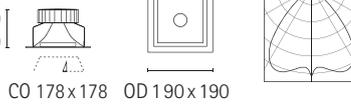
| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
| RD 130  CO 150 x 150 OD 165 x 165 | 10130 | 81 | 1580 lm | 1700 lm | 1730 lm | 1760 lm | 15 W |
| | | 82 | 2210 lm | 2380 lm | 2420 lm | 2470 lm | 20 W |
| | | 83 | 3010 lm | 3250 lm | 3300 lm | 3370 lm | 25 W |
| | | 84 | 3780 lm | 4070 lm | 4150 lm | 4230 lm | 35 W |
| RD 140 RD 150  CO 178 x 178 OD 190 x 190 | 10140 | 81 | 1600 lm | 1720 lm | 1750 lm | 1780 lm | 15 W |
| | | 82 | 2230 lm | 2410 lm | 2450 lm | 2500 lm | 20 W |
| | | 83 | 3050 lm | 3290 lm | 3340 lm | 3410 lm | 25 W |
| | | 84 | 3830 lm | 4120 lm | 4200 lm | 4280 lm | 35 W |
| RD 145 RD 150  CO 208 x 208 OD 220 x 220 | 10150 | 81 | 1510 lm | 1620 lm | 1650 lm | 1680 lm | 15 W |
| | | 82 | 2110 lm | 2270 lm | 2310 lm | 2360 lm | 20 W |
| | | 83 | 2880 lm | 3100 lm | 3150 lm | 3220 lm | 25 W |
| | | 84 | 3610 lm | 3890 lm | 3960 lm | 4040 lm | 35 W |
| RD 130  CO 150 x 150 OD 165 x 165 | 10160 | 81 | 1730 lm | 1860 lm | 1890 lm | 1930 lm | 15 W |
| | | 82 | 2410 lm | 2600 lm | 2650 lm | 2700 lm | 20 W |
| | | 83 | 3300 lm | 3550 lm | 3610 lm | 3690 lm | 25 W |
| | | 84 | 4140 lm | 4460 lm | 4540 lm | 4630 lm | 35 W |
| RD 140 RD 150  CO 178 x 178 OD 190 x 190 | 10170 | 81 | 1730 lm | 1860 lm | 1900 lm | 1940 lm | 15 W |
| | | 82 | 2420 lm | 2610 lm | 2660 lm | 2710 lm | 20 W |
| | | 83 | 3310 lm | 3560 lm | 3620 lm | 3700 lm | 25 W |
| | | 84 | 4150 lm | 4470 lm | 4550 lm | 4640 lm | 35 W |
| RD 145 RD 150  CO 208 x 208 OD 220 x 220 | 10180 | 81 | 1740 lm | 1870 lm | 1900 lm | 1940 lm | 15 W |
| | | 82 | 2430 lm | 2620 lm | 2670 lm | 2720 lm | 20 W |
| | | 83 | 3320 lm | 3580 lm | 3640 lm | 3710 lm | 25 W |
| | | 84 | 4170 lm | 4480 lm | 4570 lm | 4660 lm | 35 W |

Technical changes reserved and errors excepted!

Round downlight accessories



Various Covers for Diverse Tasks

Insertion panes made of diverse materials in various finishes. Whether satinized or opal for spreading light, an even and soft light is always given. Also in glass or acrylic version for protection. All insertion panes offer protection against splashing water, thereby attaining protection class IP43 from the underside when mounted into a closed ceiling system. Also suitable as theft and vandalism protection.

CAPPuccio

Decorative ancillary glasses are mounted on an changing cover ring with 3-point fastening. The glasses are completely or partially frosted. These optical light accessories discreetly brighten the ceiling. Easy cleaning and maintenance is possible because the cover ring can be removed tool-free.



CR with IP 43
01100.xxx.20 Acrylic, clear
01120.xxx.20 Hardened security glass, clear



CR, Standard
01000.xxx.12
CR for open downlight



CR with IP 43, acrylic
01270.xxx.20
Acrylic opal, frosted



CR with fixing bolt
01160.xxx.13
CR for open downlight with CAPPuccio glass accessories



CR with IP 43, HSG glass
01180.xxx.20
Protection pane, clear partially frosted in centre



HSG glass, partially frosted
46000.xxx
Decorative glass, clear partially frosted in centre



CR with IP 43, HSG glass
01210.xxx.20
Protection pane, clear partially frosted at edge



HSG glass, partially frosted
46100.xxx
Decorative glass, clear partially frosted at edge

► To specify the luminaire size replace the placeholders .xxx with the ring size (Example: 01270.220.20)

Add-on modular plate




Before ordering please consult us for technical details.

Modular Panels

The integration of recessed luminaires into M100 panel ceilings is made possible with modular panels. Other ceiling systems available on request. The modular panels are mounted into the ceiling construction without tools. The downlight is subsequently mounted into the ceiling section. When using the added-on modular panels the luminaire ring is replaced by this modular panel. The luminaire cover ring therefore becomes.

Cylinder for semi-recessed mounting





Semi-recessed mounting is only possible with a cover ring. Changing ring system.

Semi-Recessing Cylinder

Reduction of recessing height due to semi-recessing cylinder up to 40mm possible. Project-related supply of appropriate tilting adaptors for recessed luminaires in slant ceilings is possible.

Modular plate for panel ceilings



3-field 2-field



Modular Panels

| | |
|-----------|----------|
| 08010.165 | CO Ø 145 |
| 08010.190 | CO Ø 165 |
| 08010.220 | CO Ø 195 |



Positioning tracks, pair

| | |
|-----------|----------|
| 08050.165 | CO Ø 145 |
| 08050.190 | CO Ø 165 |
| 08050.220 | CO Ø 195 |



Semi-Recessing Cylinder

| | |
|-----------|----------|
| 08000.165 | CO Ø 145 |
| 08000.190 | CO Ø 165 |
| 08000.220 | CO Ø 195 |



Plastering frame

| | |
|-----------|----------|
| 08950.165 | CO Ø 145 |
| 08950.190 | CO Ø 165 |
| 08950.220 | CO Ø 195 |



► Plastering frame for installation without visible frame.

Square downlight accessories



Various Covers for Diverse Tasks

Insertion panes made of diverse materials in various finishes. Whether satinized or opal for spreading light, an even and soft light is always given. Also in glass or acrylic version for protection. All insertion panes offer protection against splashing water, thereby attaining protection class IP43 from the underside when mounted into a closed ceiling system. Also suitable as theft and vandalism protection.

CAPPUCCIO

Decorative ancillary glasses are mounted on an changing cover frame with 4-point fastening. The glasses are completely or partially frosted. These optical light accessories discreetly brighten the ceiling. Easy cleaning and maintenance is possible because the cover ring can be removed tool-free.



CF mit IP 43
01600.xxx.20 Acrylic, clear
01620.xxx.20 Hardened security glass, clear



CF, Standard
01500.xxx.12
CF for open downlight



CF mit IP 43, acrylic
01720.xxx.20
Acrylic opal frosted



CF with fixing bolt
01500.xxx.13
CF for open downlight with CAPPUCCIO glass accessories



CF mit IP 43, ESG-Glas
01660.xxx.20
Hardened security glass, frosted



HSG glass, partially frosted
01800.xxx.20
Decorative glass, frosted



CF with IP 43, HSG glass
01890.xxx.20
Protection pane, clear partially frosted in centre




HSG glass, partially frosted
01900.xxx.20
Decorative glass, clear partially frosted at edge



CF with IP 43, HSG-Glas
01790.xxx.20
Protection pane, clear partially frosted at edge

► To specify the luminaire size replace the placeholders .xxx with the ring size (Example: 01270.220.20)

Add-on modular plate




Before ordering please consult us for technical details.

Modular Panels

The integration of recessed luminaires into panel ceilings M100 is made possible with modular panels. (Other ceiling systems available on request.) The modular panels are mounted into the ceiling construction without tools. The downlight is subsequently mounted into the ceiling section. When using the added-on modular panels the luminaire ring is replaced by this modular panel. The luminaire cover ring is therefore made redundant.

Frame for semi-recessed mounting






Semi-recessed mounting is only possible with a cover ring. Changing ring system.

Semi-Recessing Frame

Reduction of recessing height due to semi-recessing frame up to 40mm possible. Project related supply of appropriate tilting adaptors for recessed luminaires in slant ceilings is possible.

Modular plate for panel ceilings



3-field 2-field



Modular Panels

| | |
|-----------|--------------|
| 09010.165 | CO 145 x 145 |
| 09010.190 | CO 178 x 178 |
| 09010.220 | CO 208 x 208 |




Positioning tracks, pairs

| | |
|-----------|--------------|
| 09050.165 | CO 145 x 145 |
| 09050.190 | CO 178 x 178 |
| 09050.220 | CO 208 x 208 |



Semi-Recessing Frame

| | |
|-----------|--------------|
| 09000.165 | CO 145 x 145 |
| 09000.190 | CO 178 x 178 |
| 09000.220 | CO 208 x 208 |



Plastering frame

| | |
|-----------|--------------|
| 09950.165 | CO 145 x 145 |
| 09950.190 | CO 178 x 178 |
| 09950.220 | CO 208 x 208 |




► Plastering frame for installation without visible frame.

High-output spotlights provide comfortable illuminance levels in the working plane even from high mounting heights.



A suitable light atmosphere is available for any application thanks to flexible switching and dimming options.

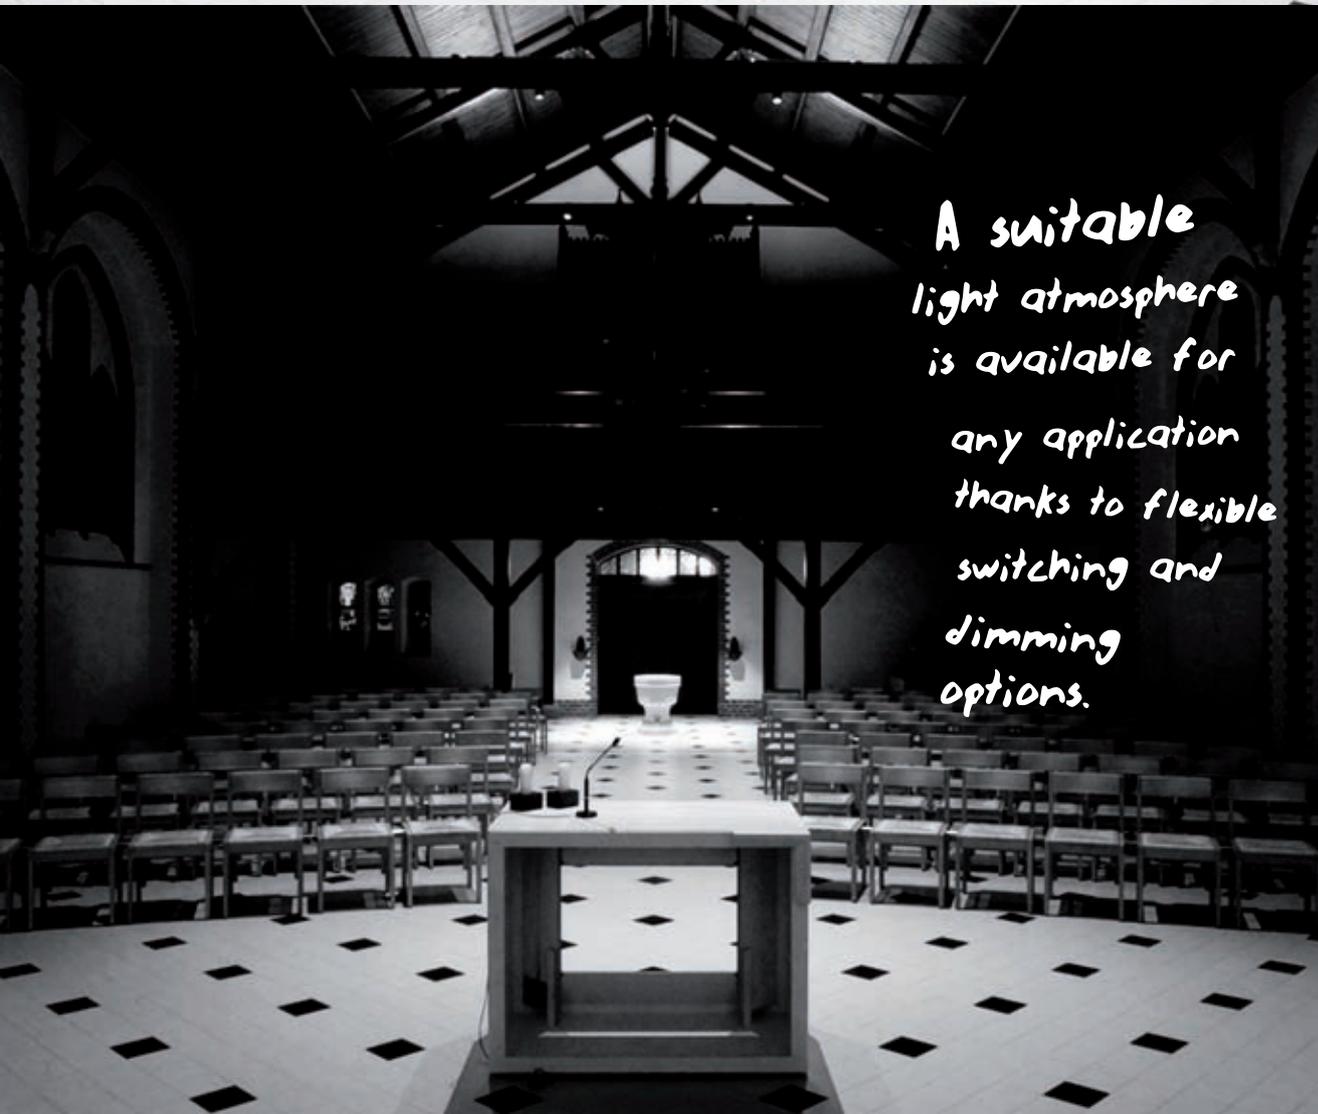

Church illumination St. Antonius, Hamm



*Narrow distribution spotlights
set eye-catching accents on
selected objects or
architectural details.*



*Modern
lighting tools
blend harmoniously
into the architecture
and support
a pleasantly clam
spatial effect.*

The neo-Gothic brickwork St. Antonius Church in Hamm, Germany, dates from the year 1896, and is located directly on the Römer-Lippe route that attracts a high number of tourists thanks to its Roman culture and water experience. As part of the extensive refurbishment work the lighting system in the church was also updated. The holistic lighting design focused on photometric quality and energy efficiency to equal amounts.

Flexible and precise LED spotlights

The installed LED spotlights blend unobtrusively into the architecture and were set precisely to the lighting requirements of the space. They emit uniform, glare-free general lighting according to requirements or set expressive highlights.

Programmed light scenes

A light control system enables switching and dimming of luminaire groups in the church. Preprogrammed light scenes can be called using the control panel in the sacristy or a remote control, for example "baptismal service" or "admission lighting".

Lighting design: Scharkon Lichtkonzepte



These LED spotlights can fulfil completely different tasks – ranging from glare-free general lighting to variable, point-precise light accents. The spotlights can be rotated through 350° and tilted between 30° and 50°. The product range was designed as flexible lighting tools and features a uniform luminaire design with three variants, two sizes and five light distribution characteristics.








LED recessed spotlights

- › luminaire housing made of aluminium and steel
- › surface powder-coated in accordance with RAL
- › aluminium reflector (Al99.99), highly polished
- › with glare-reducing protective glass
- › passive cooling system
- › pan-and-tilt adjustment; 355°/ 30°
- › LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 11, 16
- › Mid Flux LED type 12, 17
- › High Flux LED type 18



| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
| RD 140    CO Ø 130 OD Ø 140 355° | 28080 | 11 | 1080 lm | 1130 lm | 1170 lm | 1200 lm | 13 W |
| | | 12 | 1480 lm | 1540 lm | 1600 lm | 1640 lm | 17 W |
| RD 180    CO Ø 158 OD Ø 165 355° | 28090 | 16 | 1970 lm | 2060 lm | 2140 lm | 2190 lm | 17 W |
| | | 17 | 2700 lm | 2810 lm | 2920 lm | 3000 lm | 23 W |
| | | 18 | 3900 lm | 4070 lm | 4230 lm | 4330 lm | 33 W |

Technical changes reserved and errors excepted!

LED Spotlights






LED recessed spotlights

- › luminaire housing made of aluminium and steel
- › surface powder-coated in accordance with RAL
- › aluminium reflector (Al99.99), highly polished
- › with glare-reducing protective glass
- › passive cooling system

- › pan-and-tilt adjustment; 355°/ 30°
- › LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 11, 16
- › Mid Flux LED type 12, 17
- › High Flux LED type 18

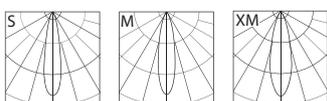

| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
| RD 120  CO Ø 130 OD Ø 140 355° | 28070 | 11 | 1080 lm | 1130 lm | 1170 lm | 1200 lm | 13 W |
| | | 12 | 1480 lm | 1540 lm | 1600 lm | 1640 lm | 17 W |
| RD 180  CO Ø 158 OD Ø 165 355° | 28160 | 16 | 1970 lm | 2060 lm | 2140 lm | 2190 lm | 17 W |
| | | 17 | 2700 lm | 2810 lm | 2920 lm | 3000 lm | 23 W |
| | | 18 | 3900 lm | 4070 lm | 4230 lm | 4330 lm | 33 W |

Technical changes reserved and errors excepted!


LED Spotlights




LED recessed spotlights

- › luminaire housing made of aluminium and steel
- › surface powder-coated in accordance with RAL
- › aluminium reflector (Al99.99), highly polished
- › with glare-reducing protective glass
- › passive cooling system
- › pan-and-tilt adjustment; 355°/ 40°
- › LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 11, 16
- › Mid Flux LED type 12, 17
- › High Flux LED type 18

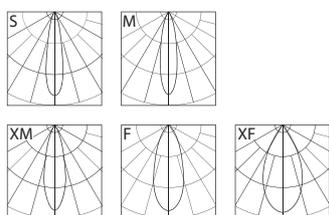


| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
| RD 80 [   CO Ø 130 OD Ø 140 355° | 28060 | 11 | 1080 lm | 1130 lm | 1170 lm | 1200 lm | 13 W |
| | | 12 | 1480 lm | 1540 lm | 1600 lm | 1640 lm | 17 W |
| RD 110 [   CO Ø 158 OD Ø 165 355° | 28170 | 16 | 1970 lm | 2060 lm | 2140 lm | 2190 lm | 17 W |
| | | 17 | 2700 lm | 2810 lm | 2920 lm | 3000 lm | 23 W |
| | | 18 | 3900 lm | 4070 lm | 4230 lm | 4330 lm | 33 W |

Technical changes reserved and errors excepted!






LED Strip Lighting

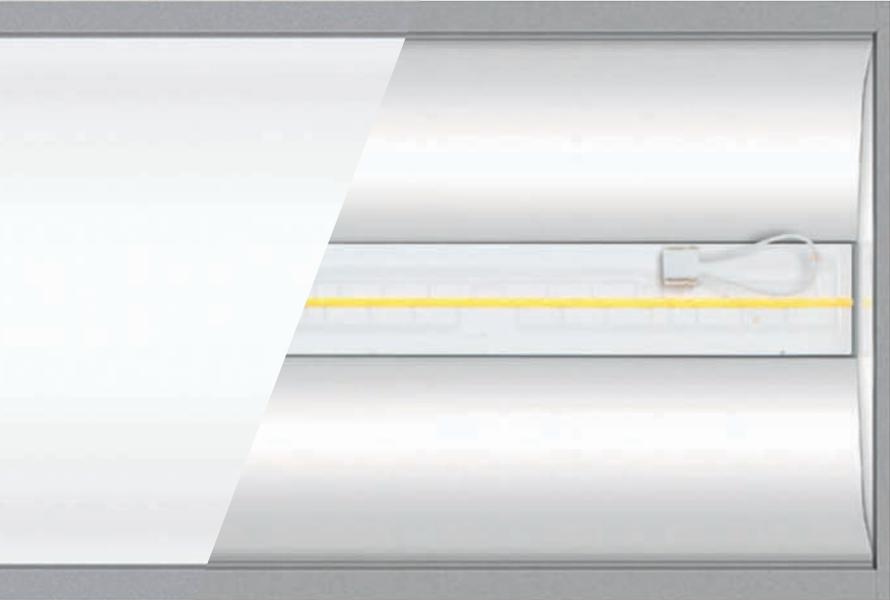




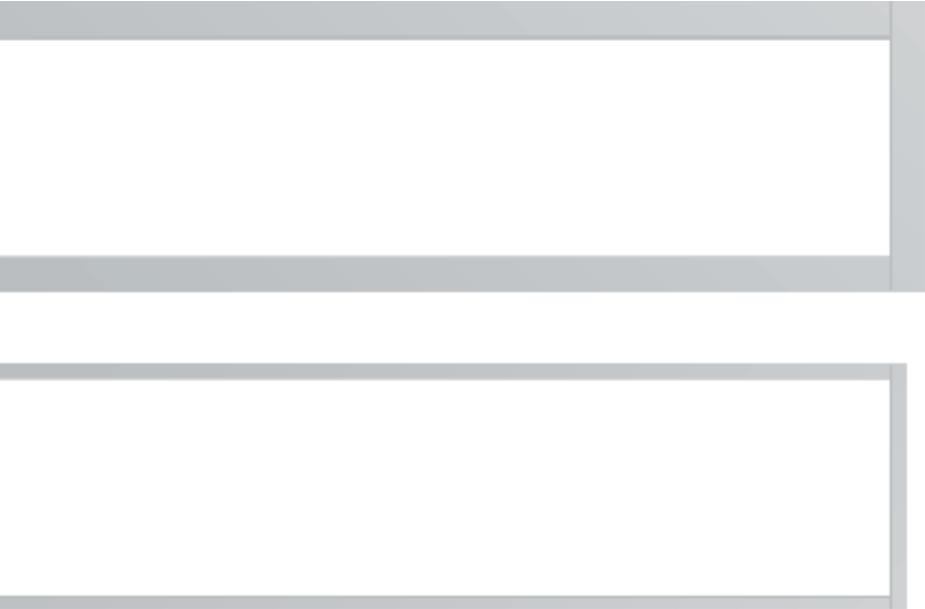


LED RAIL Strip Lighting
The single luminaires are constructed of sharp-edged, drawn aluminium extrusion. LED arrays featuring COB ceramic technology are used. Available versions consist of HE (High Efficiency), HO (High Output), HP (High Performance) and H+ (High Efficiency Eco). The luminaires can be integrated both vertically and horizontally into walls and ceilings.

The single luminaires are available either frameless or with a filigree, all-round edge. Covers consist of an opal acrylic glass diffuser for general lighting or a microprismatic cover of transparent polycarbonate. The microprismatic cover is suitable for the standard-compliant illumination of DSE workstations.

RAIL strip lighting, frameless

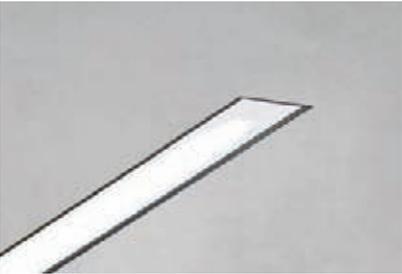

RAIL strip lighting, with frame

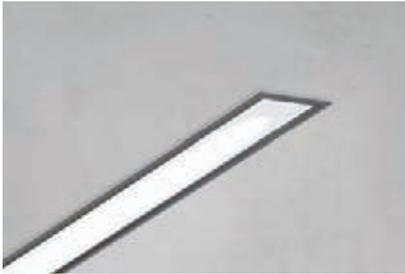



LED RAIL Light lines

Housing of sharp-edged, drawn aluminium extrusion. Version with narrow, all-round edge for installing in plasterboard ceiling cut-outs. Surface decoratively anodised in accordance with E6EV1. Alternatively available in satin-matt white powder-coated. One-piece luminaire, with end cap, cover and photometric system. Prepared for mounting in accordance with mounting system M. Equipped with ceramic technology LEDs, high service life, L90B10 at 50,000h. 3

Step MacAdam. With integrated electronic control units. Wired ready for connection with 3-pole connection terminal.

Full-surface luminaire cover via clip profile. With opal acrylic glass diffuser or with DSE workstation-compliant prismatic cover of polycarbonate. (CAT)

Mounting options

Various mounting options are available for installation in suspended ceilings. Please see below for an overview of the most commonly used systems. Project-specific solutions are also possible and are solved by our design team.



Mounting systems:

SYSTEM K
Mounting on stud bolts




SYSTEM H
Mounting on auxiliary construction




SYSTEM M
Mounting with stirrup

Cover options

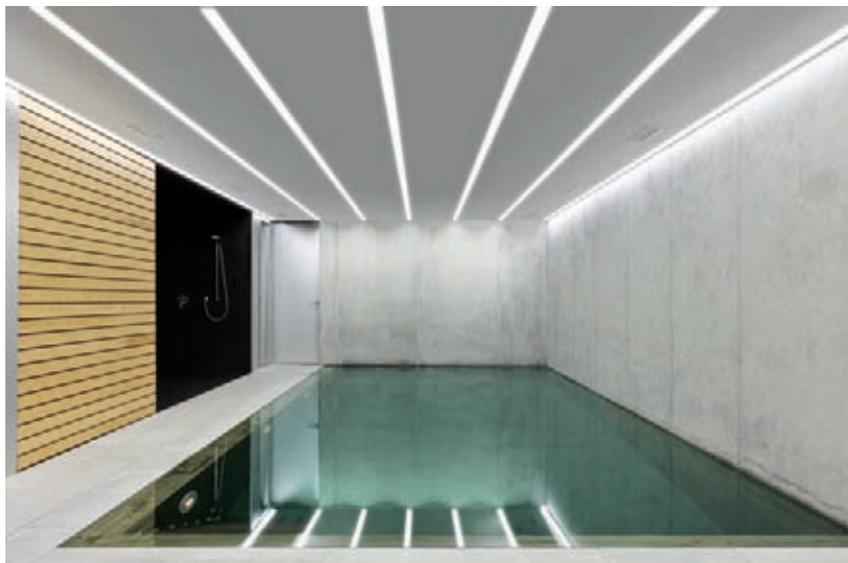

Profile covers

Three different covers can be specified for light inserts with direct light distribution. This enables both uniform planar lighting and the standard-compliant illumination of workstations. All covers were designed for optimum light output ratios and maximum glare control.

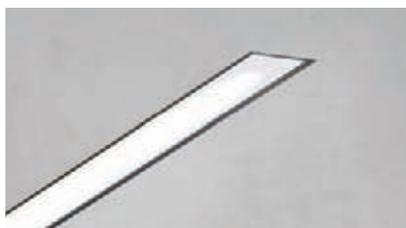


Diffusor, opal

Opal acrylic diffuser with satin matt surface. Illumination without points or shadowing, with high transmission factor. With diffuse light distribution for pleasant, glare-free light.




Prismatic diffusor

Surface with microprismatic structure for luminance minimisation. Optic for glare-free light with increased brilliance.

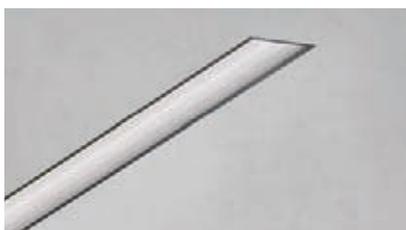

Prismatic diffusor, opal


Microprismatic cover as with the prismatic diffusor but with additional opal diffuser for a homogeneous appearance and increased luminance reduction.

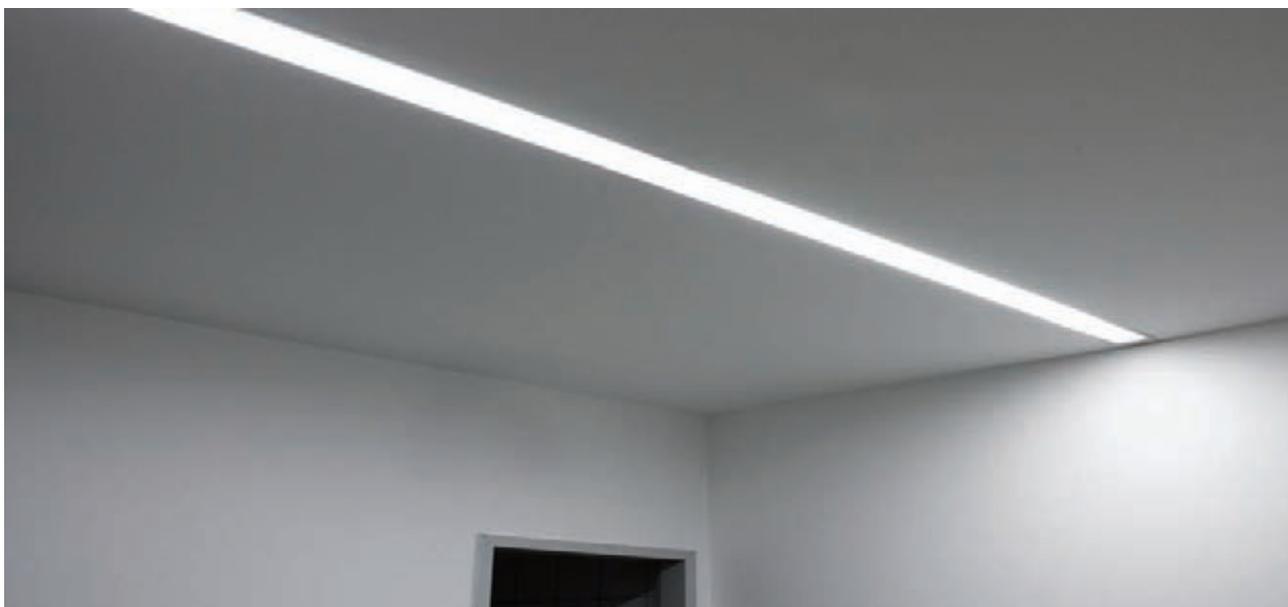

Shadow-free illumination

LED RAIL has no dark zones at the light source transitions. The system was designed specifically for non-interrupted light lines. The luminous diffuser surface is seamless and with shadow-free illumination.

LED strip lighting for shadow-free acrylic cover

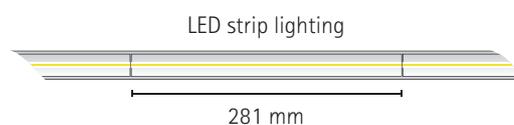

Profile covers

Profile covers are cut by the millimetre according to the specific order. Supply dimensions can be freely specified with a maximum production length of 6 m. Cutting costs are calculated separately for the blank sections. Profile cross-sections are calculated per metre. We would be pleased to support and design your desired geometry.

Diffusor, opal



Microprismatic



Microprismatic opal



Blank cover; available in aluminium or powder-coated in accordance with RAL



Fixed spotlight inserts



Adjustable spotlight inserts




Spotlight with lens optic

Dual Light


To provide scenic light, spotlight inserts are available. Highly diverse lighting moods can be created by using different light sources. Diffuse and pin-pointed light are combined as a double function in one luminaire. The even ambient light produced by the LED strip lighting is complemented by additional, independent switchable and controllable lighting.

Spotlight units

Recessed modules with fixed or adjustable spotlight units enable highly effective accent light. Various beam angles and outputs are available. To ensure the requisite cooling, ventilation must be provided via ventilation elements in the profile. Required minimum lengths must be observed.

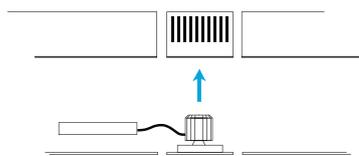

Short ventilation element for LED RAIL spotlight inserts with separated control gear.

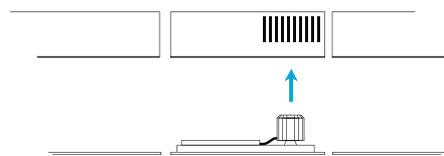

Long ventilation element for LED RAIL spotlight inserts with integrated control gear.



The LED RAIL light line features almost unlimited applications – it can be used for light guidance, as general lighting and for designing interiors. A variety of connection elements for the profiles enables wide design flexibility for the line layouts. Individual connector elements can be supplied on request.


- ▶ Extensive installation and mounting options allow integration into highly diverse ceiling systems.




LED RAIL Mounting options

Various mounting options are available for installation purposes. Please see below for an overview of the most commonly used systems. Project specific solutions are also possible and are solved by our design team.

The plastered-in mounting allows the luminaire to be fully integrated into the building structure. To achieve a perfect result, the luminaires must be mounted and fitted with the utmost care. The expansion joint mentioned here is an absolute necessity.

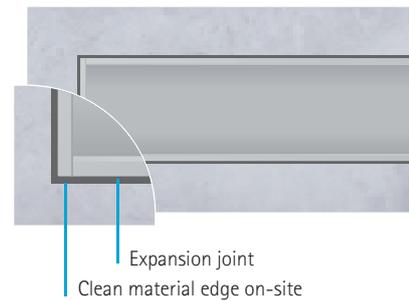

As an alternative to the abovementioned flush-plastered mounting, the installation with shadow gap is also recommendable. A cleanly finished ceiling cut-out can be easily produced using precast plaster parts or plaster rails. Various concrete installation housings are also available for our strip lights.



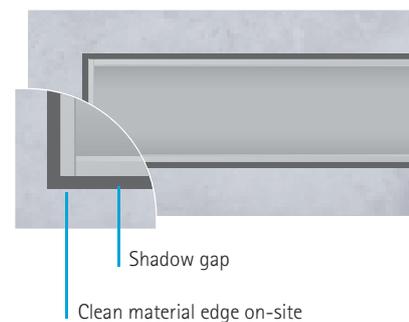


Using individually precast, shaped plaster parts produces a unified appearance of the ceiling system and luminaire. The shaped plaster parts are designed to fit the luminaires to be installed, ensuring uncomplicated installation by the specialist fitters.


The variety of shapes is limitless, giving the designer every possibility to be creative. We are happy to provide support for the technical implementation and can name suppliers once the requirements have been fixed.




- 
SYSTEM M
Mounting with stirrup
- 
SYSTEM K
Mounting on stud bolts
- 
SYSTEM H
Mounting on auxiliary construction
- 
SYSTEM L
Mounting with angle bracket
- 
SYSTEM B
Wire rope suspension with rapid connector system

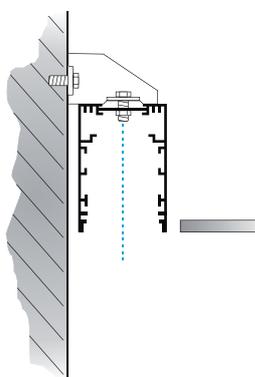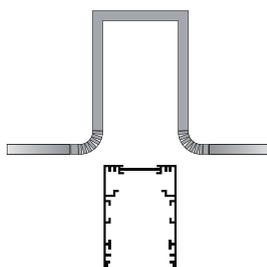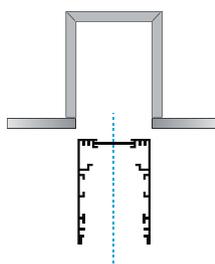

Wall-mounting the luminaire with wall bracket with predefined offset from wall. Fitting to the ceiling with joint. Ceiling finished with finishing profile.

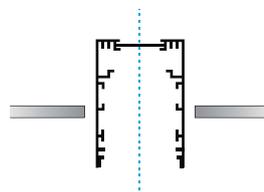

Ceiling cut-out to be produced on-site by the ceiling builder. Ceiling finished with finishing profile.

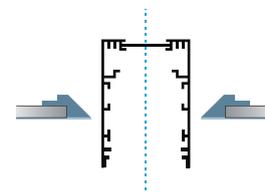

Ceiling cut-out produced very exactly on-site using solid ceiling plaster profiles.



LED RAIL

Air-conditioning

Sensor

Loudspeakers

Fire alarm detectors

Water sprinkler preparation



Air Conditioning Technology

In addition to the harmonious design styling, the combination of air conditioning and lighting technology also reduces installation time by reducing the ceiling cut-outs. System adaptors allow the integration of additional elements at the same time fulfilling various climatic demands. A spatial separation of individual technical elements guarantees highly efficient individual functions. Controllable integration of air input and output.

Sound

Wide band loudspeakers with 100 volt technology are available as a system element. A bayonet lock allows them to be integrated, aligned and reversed.

Fire Alarm Detectors


In principle conventional fire alarm detectors can also be integrated as a system element into LED RAIL profiles. To ensure conformity with the current German VDE guidelines, the possibility of integration must be checked in detail and must be confirmed by the fire alarm detector manufacturer with a certificate of compliance (German regulation for the German market).

Water Sprinkler

System adaptors allow the installation of a covering plate with 50mm cut out hole. Avoiding frictional connected luminaire the installation of suspended screen sprinklers and the supply of the sprinkler pipes can be realized. A certificate of compliance by the water sprinkler manufacturer is recommended.

Special Equipment

Besides the mentioned basic elements further technical elements can be integrated in addition to the indicated basic modules. These include: video monitors; alarm and sensor technology; revision elements for control valves and maintenance elements.

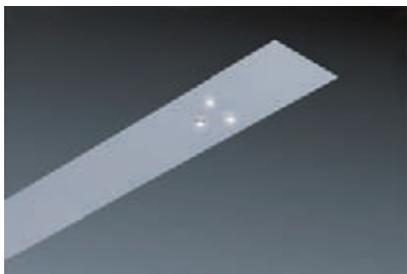


Safety Luminaires

Independent luminaire inserts with or without single batteries are integrated as system elements in a non-maintained circuit. A wide variety of wattages allows the emergency lighting units to be used as safety or secondary lighting.




Rescue signs

Rescue signs can be integrated in continuous circuits or into reference luminaires by using optical lighting accessories. Easy revision of the additional elements allows usage of single batteries.

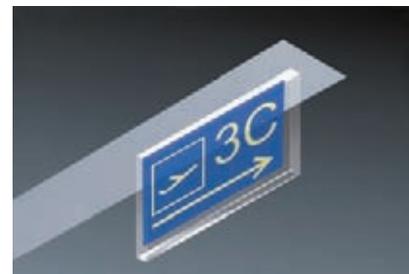

Guideposts

Beside emergency and mandatory signs, information and guidance signs can also be integrated in the lighting system.

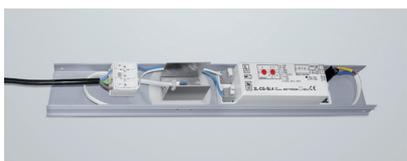

LED Emergency Module

Specific components such as monitoring modules, AC/DC switching points, address modules and individual batteries can be integrated for the emergency lighting function.



Emergency lighting unit:
Single battery with control LED




Monitoring component




Change-over relays


LED RAIL Strip lighting

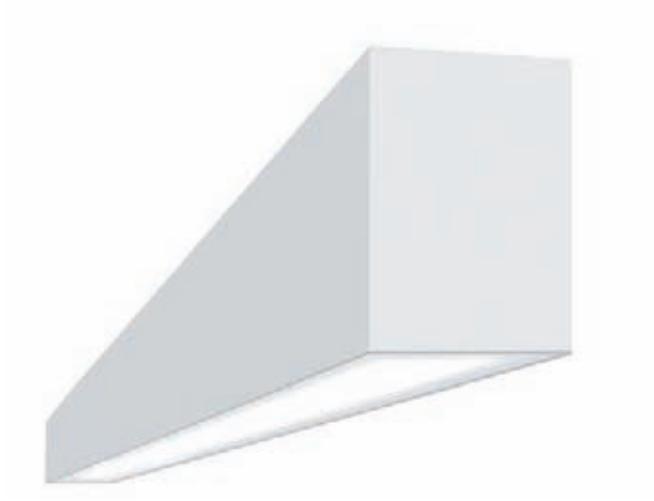

1751... opal



1752... prismatic, clear

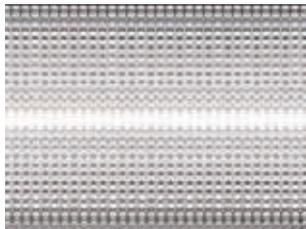

LED RAIL strip lighting, frameless

- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › plaster mounting or mounting with shadow gap
- › prepared for mounting system M
- › LED COB array, L90/B10 – 50000 h

› Small Flux LED type 03


› Mid Flux LED type 04

› High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---|---|---------|----------|---------|---------|---------|---------|-------|
| RD 100  |  CO 70 x 578 OD 68 x 575 |  | 17512 | 03 | 1200 lm | 1250 lm | 1280 lm | 1330 lm | 15 W |
| | | | | 04 | 1690 lm | 1750 lm | 1790 lm | 1850 lm | 20 W |
| | | | | 05 | 2300 lm | 2390 lm | 2440 lm | 2540 lm | 28 W |
| RD 100  |  CO 70 x 872 OD 68 x 870 |  | 17513 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| RD 100  |  CO 70 x 1152 OD 68 x 1150 |  | 17514 | 03 | 2410 lm | 2500 lm | 2560 lm | 2660 lm | 25 W |
| | | | | 04 | 3380 lm | 3500 lm | 3580 lm | 3700 lm | 36 W |
| | | | | 05 | 4600 lm | 4780 lm | 4890 lm | 5080 lm | 52 W |
| RD 100  |  CO 70 x 1432 OD 68 x 1430 |  | 17515 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| RD 100  |  CO 70 x 578 OD 68 x 575 |  | 17522 | 03 | 1440 lm | 1500 lm | 1540 lm | 1590 lm | 15 W |
| | | | | 04 | 2030 lm | 2100 lm | 2150 lm | 2230 lm | 20 W |
| | | | | 05 | 2760 lm | 2870 lm | 2940 lm | 3050 lm | 28 W |
| RD 100  |  CO 70 x 872 OD 68 x 870 |  | 17523 | 03 | 2170 lm | 2250 lm | 2310 lm | 2390 lm | 20 W |
| | | | | 04 | 3040 lm | 3160 lm | 3230 lm | 3340 lm | 28 W |
| | | | | 05 | 4140 lm | 4310 lm | 4410 lm | 4580 lm | 40 W |
| RD 100  |  CO 70 x 1152 OD 68 x 1150 |  | 17524 | 03 | 2890 lm | 3010 lm | 3080 lm | 3190 lm | 25 W |
| | | | | 04 | 4060 lm | 4210 lm | 4300 lm | 4460 lm | 36 W |
| | | | | 05 | 5530 lm | 5750 lm | 5890 lm | 6110 lm | 52 W |
| RD 100  |  CO 70 x 1432 OD 68 x 1430 |  | 17525 | 03 | 3620 lm | 3760 lm | 3850 lm | 3990 lm | 30 W |
| | | | | 04 | 5080 lm | 5260 lm | 5380 lm | 5570 lm | 44 W |
| | | | | 05 | 6910 lm | 7190 lm | 7360 lm | 7640 lm | 64 W |

Technical changes reserved and errors excepted!


LED RAIL Strip lighting

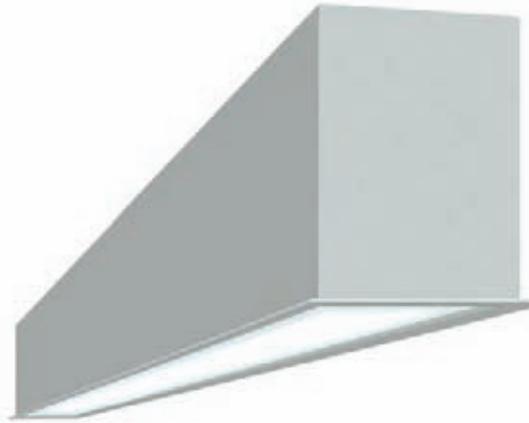

1755... opal



1756... prismatic, clear

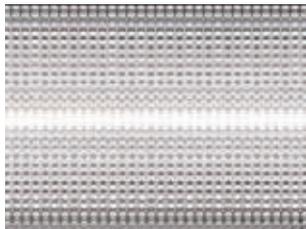

LED RAIL strip lighting with frame

- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › plaster mounting or mounting with shadow gap
- › prepared for mounting system M
- › LED COB array, L90/B10 – 50000 h

› Small Flux LED type 03

› Mid Flux LED type 04

› High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---|---|---------|----------|---------|---------|---------|---------|-------|
| RD 100  |  CO 70 x 578 OD 80 x 591 |  | 17552 | 03 | 1200 lm | 1250 lm | 1280 lm | 1330 lm | 15 W |
| | | | | 04 | 1690 lm | 1750 lm | 1790 lm | 1850 lm | 20 W |
| | | | | 05 | 2300 lm | 2390 lm | 2440 lm | 2540 lm | 28 W |
| RD 100  |  CO 70 x 872 OD 80 x 886 |  | 17553 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| RD 100  |  CO 70 x 1152 OD 80 x 1166 |  | 17554 | 03 | 2410 lm | 2500 lm | 2560 lm | 2660 lm | 25 W |
| | | | | 04 | 3380 lm | 3500 lm | 3580 lm | 3700 lm | 36 W |
| | | | | 05 | 4600 lm | 4780 lm | 4890 lm | 5080 lm | 52 W |
| RD 100  |  CO 70 x 1432 OD 80 x 1446 |  | 17555 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| RD 100  |  CO 70 x 578 OD 80 x 591 |  | 17562 | 03 | 1440 lm | 1500 lm | 1540 lm | 1590 lm | 15 W |
| | | | | 04 | 2030 lm | 2100 lm | 2150 lm | 2230 lm | 20 W |
| | | | | 05 | 2760 lm | 2870 lm | 2940 lm | 3050 lm | 28 W |
| RD 100  |  CO 70 x 872 OD 80 x 886 |  | 17563 | 03 | 2170 lm | 2250 lm | 2310 lm | 2390 lm | 20 W |
| | | | | 04 | 3040 lm | 3160 lm | 3230 lm | 3340 lm | 28 W |
| | | | | 05 | 4140 lm | 4310 lm | 4410 lm | 4580 lm | 40 W |
| RD 100  |  CO 70 x 1152 OD 80 x 1166 |  | 17564 | 03 | 2890 lm | 3010 lm | 3080 lm | 3190 lm | 25 W |
| | | | | 04 | 4060 lm | 4210 lm | 4300 lm | 4460 lm | 36 W |
| | | | | 05 | 5530 lm | 5750 lm | 5890 lm | 6110 lm | 52 W |
| RD 100  |  CO 70 x 1432 OD 80 x 1446 |  | 17565 | 03 | 3620 lm | 3760 lm | 3850 lm | 3990 lm | 30 W |
| | | | | 04 | 5080 lm | 5260 lm | 5380 lm | 5570 lm | 44 W |
| | | | | 05 | 6910 lm | 7190 lm | 7360 lm | 7640 lm | 64 W |


Technical changes reserved and errors excepted!

LED RAIL Profiles

System luminaires


With LED RAIL system luminaires, system components are compiled according to project needs. This enables continuous light channel systems matched to the architecture. The modular selection of system components enables lighting solutions accor-

ding to the specific designs of the lighting designer. Detailed planning of the system can be directly and simply implemented. Functional additions can also be subsequently installed with ease.

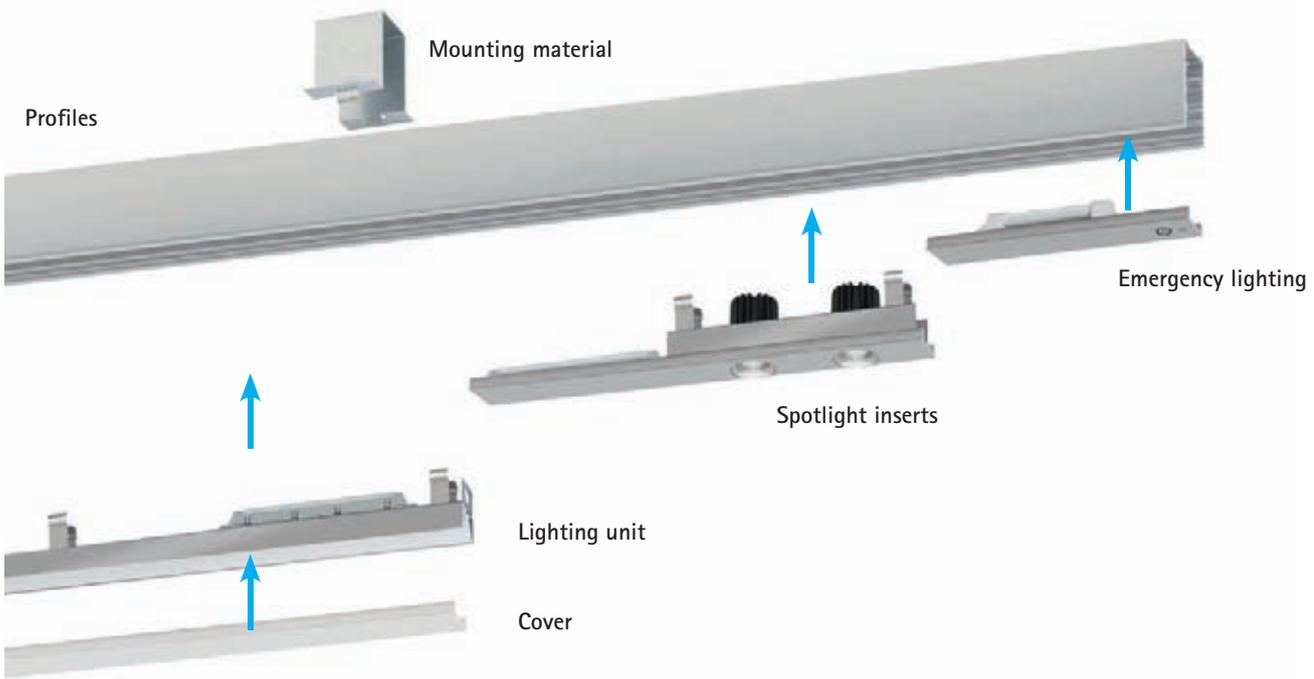

An empty profile is installed in the ceiling to be retroactively configured with the different luminaire inserts. To achieve seamless, shadow-free illumination, light inserts are butted together. Light-distributing diffusers with opal, satin matt surfaces form the termination of the luminaire. Despite high transmission, the luminaire cover is uniformly illuminated without points or shadows. Luminaire covers are also available with a microprismatic surface. The mi-

croprisms achieve effective glare control. These covers are suitable for the standard-compliant illumination of DSE workstations. The light channels can also accommodate spotlights, blank elements and technical elements. The channels also have sufficient space for cable runs.

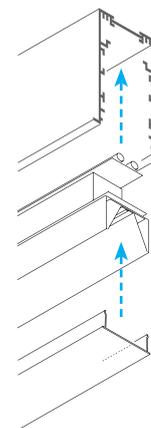

Luminaire profiles







- › profiles for ceiling installation with or without frame
- › made of sharp-edged extruded aluminium
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › prepared with mounting holes for mounting system M
- › supply dimensions freely specifiable to 6 m
- › millimetre-precise cuts

Opal cover

- › for the planar lighting of general areas
- › uniform, shadow-free illuminated surface
- › high transmission factor
- › diffuse light distribution

Prismatic cover

- › for standard-compliant illumination of DSE workstations
- › cover available in acrylic opal or prismatic
- › high brilliance with glare-free light
- › uniform appearance of light

| | | Profiles | |
|---|---|------------------------|------------------------------------|
|  | RD = 100 B = 68 CO = 70 | Frameless | |
| | | 17600.xxx | Luminaire profile, empty in xxx cm |
| | | 17601.000 | Sawed cutting |
|  | RD = 100 B = 80 CO = 70 | With frame | |
| | | 17610.xxx | Luminaire profile, empty in xxx cm |
| | | 17601.000 | Sawed cutting |
| <hr/> | | | |
| | | Cover | |
|  |  | Acrylic Diffusor, opal | |
| | | 17640.xxx | Cover in xxx cm |
| | | 17601.000 | Sawed cutting |
|  |  | Microprismatic, clear | |
| | | 17660.xxx | Cover in xxx cm |
| | | 17601.000 | Sawed cutting |
|  |  | Microprismatic, opal | |
| | | 17670.xxx | Cover in xxx cm |
| | | 17601.000 | Sawed cutting |
|  |  | Blank cover aluminium | |
| | | 17650.xxx | Cover in xxx cm |
| | | 17601.000 | Sawed cutting |

LED RAIL Lighting units







LED Lighting units

- › luminaire modules for installing in empty profiles
- › reflectors for homogeneous, shadow-free illumination
- › 281 mm module dimensions
- › modules available from 1-length to 6-length
- › control units optionally static or regulable

› LED COB-Array, L90/B10 – 50000 hrs

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

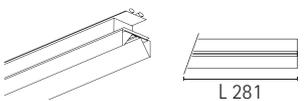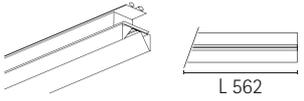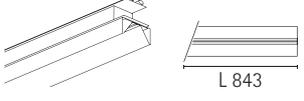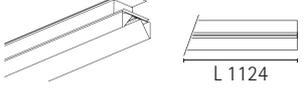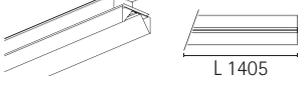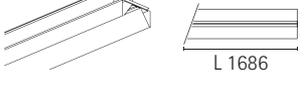


| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
|  | 17711 | 03 | 770 lm | 800 lm | 820 lm | 850 lm | 10 W |
| | | 04 | 1080 lm | 1120 lm | 1145 lm | 1185 lm | 12 W |
| | | 05 | 1470 lm | 1530 lm | 1565 lm | 1625 lm | 16 W |
|  | 17712 | 03 | 1540 lm | 1600 lm | 1640 lm | 1700 lm | 15 W |
| | | 04 | 2160 lm | 2240 lm | 2290 lm | 2370 lm | 20 W |
| | | 05 | 2940 lm | 3060 lm | 3130 lm | 3250 lm | 28 W |
|  | 17713 | 03 | 2310 lm | 2400 lm | 2460 lm | 2550 lm | 20 W |
| | | 04 | 3240 lm | 3360 lm | 3435 lm | 3555 lm | 28 W |
| | | 05 | 4410 lm | 4590 lm | 4695 lm | 4875 lm | 40 W |
|  | 17714 | 03 | 3080 lm | 3200 lm | 3280 lm | 3400 lm | 25 W |
| | | 04 | 4320 lm | 4480 lm | 4580 lm | 4740 lm | 36 W |
| | | 05 | 5880 lm | 6120 lm | 6260 lm | 6500 lm | 52 W |
|  | 17715 | 03 | 3850 lm | 4000 lm | 4100 lm | 4250 lm | 30 W |
| | | 04 | 5400 lm | 5600 lm | 5725 lm | 5925 lm | 44 W |
| | | 05 | 7350 lm | 7650 lm | 7825 lm | 8125 lm | 64 W |
|  | 17716 | 03 | 4620 lm | 4800 lm | 4920 lm | 5100 lm | 36 W |
| | | 04 | 6480 lm | 6720 lm | 6870 lm | 7110 lm | 52 W |
| | | 05 | 8820 lm | 9180 lm | 9390 lm | 9750 lm | 76 W |

LED spotlight units


- › made of sharp-edged extruded aluminium sheath
- › available with separated or integrated control gear
- › mounting preparation ex-works as system-integrated component
- › wired ready for connection with heat-resistant cable
- › different reflectors available

► Reflector order code:



- S = Spot
- M = Medium
- F = Flood

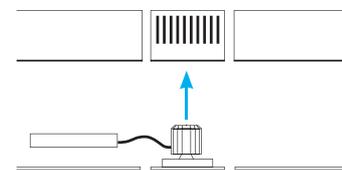

Short ventilation element for LED RAIL spotlight inserts with separated control gear.

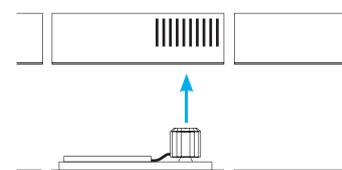

Long ventilation element for LED RAIL spotlight inserts with integrated control gear.



| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---------|----------|--------|--------|------------|--------|----------|
| Adjustable spotlight inserts | | | | | | | |
|  separated ECG | 17731 | 120 mm | | | 940 lm | | 11 W |
| | 17732 | 220 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17733 | 400 mm | | | 3 x 940 lm | | 3 x 11 W |
|  integrated ECG | 17741 | 350 mm | | | 940 lm | | 11 W |
| | 17742 | 450 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17743 | 650 mm | | | 3 x 940 lm | | 3 x 11 W |
| Fixed spotlight inserts | | | | | | | |
|  separated ECG | 17751 | 120 mm | | | 940 lm | | 11 W |
| | 17752 | 220 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17753 | 400 mm | | | 3 x 940 lm | | 3 x 11 W |
|  integrated ECG | 17761 | 350 mm | | | 940 lm | | 11 W |
| | 17762 | 450 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17763 | 650 mm | | | 3 x 940 lm | | 3 x 11 W |
| Spotlight with lens optic | | | | | | | |
|  separated ECG | 17771 | 120 mm | | | 940 lm | | 11 W |
| | 17772 | 220 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17773 | 400 mm | | | 3 x 940 lm | | 3 x 11 W |
|  integrated ECG | 17781 | 350 mm | | | 940 lm | | 11 W |
| | 17782 | 450 mm | | | 2 x 940 lm | | 2 x 11 W |
| | 17783 | 650 mm | | | 3 x 940 lm | | 3 x 11 W |

LED RAIL System


RAIL System connectors

- › numerous design possibilities
- › T-connector for expansion
- › corner connector for 90° angle
- › corner connector possible for modified angles
- › mounting systems for all ceiling systems

Example of use:

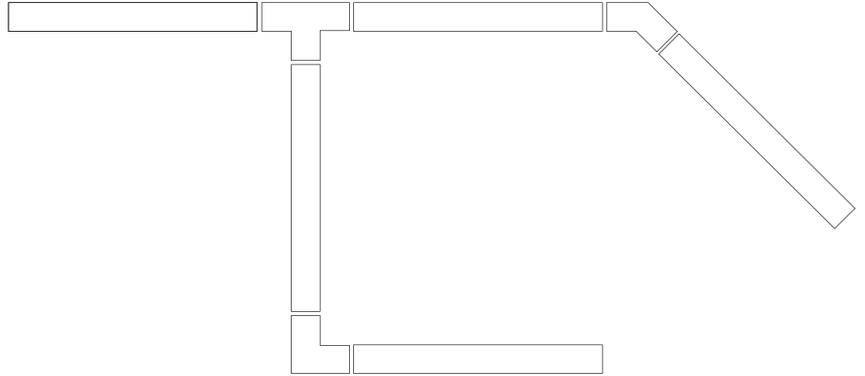

LED RAIL frameless



LED RAIL with frame

Mounting system:



End cover
Art.-No.: 17620.99



End cover
Art.-No.: 17630.99



SYSTEM K
Mounting on stud bolts



T-Connector
Art.-No.: 17620.95



T-Connector
Art.-No.: 17630.95



SYSTEM H
Mounting on auxiliary constru.



L-Connector angle 90°
Art.-No.: 17620.93



L-Connector angle 90°
Art.-No.: 17630.93



SYSTEM M
Mounting with stirrup



L-Connector special angle
Art.-No.: 17620.90




L-Connector special angle
Art.-No.: 17630.90




SYSTEM L
Mounting with angle bracket

RAIL System connectors


- › numerous design possibilities
- › compensation cover for perfect fitting
- › various fixing and suspension possibilities




SYSTEM K
Mounting on stud bolts



SYSTEM H
Mounting on auxiliary construction



SYSTEM L
Mounting with angle bracket



SYSTEM B
Wire rope suspension with rapid connector system



Spacing cover
Art.-No.: 17640.99



Straight connector
Art.-No.: 17620.98



Mounting brackets, system M
17500.80 for slab thickness 12 mm
cut-out width 72 mm



Wire-rope suspension, system B
17621.11 wire rope L = 1000 mm
17621.12 wire rope L = 2000 mm



Wire-rope suspension with canopy and cable
17621.21 wire rope L = 1000 mm
17621.22 wire rope L = 2000 mm



Through-wiring, 3-pole
17703.04 for LED RAIL 400 mm
17703.10 for LED RAIL 1000 mm
17703.20 for LED RAIL 2000 mm
17703.30 for LED RAIL 3000 mm



Through-wiring, 5-pole
17705.04 for LED RAIL 400 mm
17705.10 for LED RAIL 1000 mm
17705.20 for LED RAIL 2000 mm
17705.30 for LED RAIL 3000 mm

Oliver Bienkowski

Chief Executive and enthusiastic mover of the "Caveman international" advertising agency as well as officer-in-charge of the PixelHELPER Foundation.

OLIVER

BIENKOWSKI





Since the attempted coup in July 2016, the Turkish government has been vehemently opposed to anti-government journalists and media. The passports of journalists were seized and authors were taken into custody. Over 130 media companies have already been closed, including 29 book publishers that were also expropriated. With this projection, PixelHELPER prompted the German government and European Commission to take a stance regarding the situation in Turkey, and both instances must actively demand unlimited freedom of opinion in their decisions, actions and statements. Freedom of

expression is a human right and cannot be negotiated. Furthermore, affected journalists and authors require rapid help from Germany and Europe, for example for the unbureaucratic issuing of emergency aid visas. Journalists, authors and publishers as well as books, magazines and newspapers provide an important contribution to democracy and freedom, and for this reason PixelHELPER decisively supports freedom of opinion, information and the press.

LIGHT AS A SPOKESPERSON

Oliver Bienkowski is driven by the desire to leave the world in a better condition than he found it. As a consequence, after his work for the special advertising agency Caveman he committed himself as a light artist at PixelHELPER. Inspired by the principles of the freemasons, this international charitable organisation is active for human rights and minorities. A central medium with the temporary actions of the artists' collective is light, and by designing projections, PixelHELPER takes a stance about selected events in global politics. The luminous messages can be coordinated quickly and specifically to the location, topic and projection surface. People respond to light. As a consequence, light is the ideal design medium to arouse attention, stimulate contemplation and initiate active participation.



Photo: Martin Peterdamm Photography + PixelHELPER

This light art cartoon on the facade of the Saudi Arabian Embassy in Berlin shows the flag of ISIS and the logotype "Daesh Bank", and with this campaign PixelHELPER criticises financing of the terror and commits itself to releasing the blogger Raif Badawi. "Daesh" is the Arabian abbreviation for "Islamic state in Iraq and Greater Syria".



Mixing,
seeing,
tasting.

Eduard Hitzberger, one of Switzerland's top-rated chefs with 18 Gault Millau points and two Michelin stars, realises his vision of high quality fast food with his new "Hitzberger" fast food concept. His motto consists of goodbye to junk food and hello to tasty, healthy food at fair prices. The newly opened Hitzberger location in the main Zurich railway station radiates in

a pleasantly warm light colour of 2700 Kelvin. The café and take-away thus become a calm oasis in the busy Shopville of the station. The corporate lighting of Hitzberger achieves individuality and a high recognition factor at the new site. LED spotlights are used in ceiling-suspended tracks. The LEDs significantly cut energy consumption compared to the



previously used halogen spots. Lighting situations for the seasonally changing product spectrum can be adapted thanks to flexible positioning of the luminaires along the track and the possibility of exchanging reflectors without tools. Despite the ceiling being already overloaded with building service installations, the lighting designers aimed for a flexible lighting concept, and tracks

with lengths adapted to the ceiling layout proved to be the perfect solution. As a result many problems could be solved during the design phase, thus helping to maintain the tight time schedule for luminaire mounting.



Flooded with light

The retail areas previously used differently were combined to a single space for the Hitzberger Café and take-away. The open restaurant landscape created in this way consists of the three areas of bakery sales area, café and lounge. That meant that the lighting design was faced with three essential tasks - it needed to create good visual conditions in the work areas for kitchen and sales, ensure attractive illumination of the goods displayed and also create an inviting atmosphere for guests. The bakery sales area is surrounded on three sides by fenestration at room height, creating much window space and also providing customers with an unlimited view into the interior space flooded with light. Goods are displayed in glass cabinets placed directly on the sales counters, and these are illuminated by the recessed spotlights 1228. The luminaires were aligned with high precision to avoid reflections on the glass surfaces, exclude glare for customers and guarantee a clear view of the baked goods. In the café area the suspended acoustic ceiling was raised





Architecture, interior design: lehnertomaselliarchitekten
Shop fitting: Hans Rickenbacher AG Ladenbau optimal.

in places to break up the low room height. Pendant luminaires with large textile shades emphasise this central room section and also generate an atmosphere of well-being. Guests have a good view from here into all the restaurant areas. Sales in the bakery or activity at the buffet can be followed and a glance can be taken of the new lounge and

then right out to the main road. In order to modify the light ambience at any time according to room utilisation, all luminaires in the guest room and bar area are DALI-dimmable.



Fried egg rice with beef and veggies

2 servings

Prep. time: 20-30 minutes + cooking time of rice approx. (20 minutes)

Ingredients:


500 g cooked jasmine rice
200 g beef, diced
2 eggs, beaten to mix
1 onion, finely diced
1/2 bell pepper, finely diced
3 TS soy sauce
1 TSP toasted sesame oil
100 ml water
1 scallions, finely chopped
Pepper

Beef marinade:
2 TS soy sauce
1 TSP toasted sesame oil
1 TS corn starch
Pepper

Directions:

1. Heat pan and add 1 TS oil. Add beef and sear, take out after 5 minutes.
2. Add 1 TS oil to the pan. Add eggs and stir, take them out when cooked.
3. Add 1 TS oil to the empty pan. Braise onion and bell pepper lightly for 5 minutes. Add the cooked rice and gradually add 100 ml water to the pan and stir until grains separate.
4. Mix with beef and eggs and keep stirring until heated through.
5. Stir in soy sauce, sesame oil and scallions. Add salt and pepper to taste.



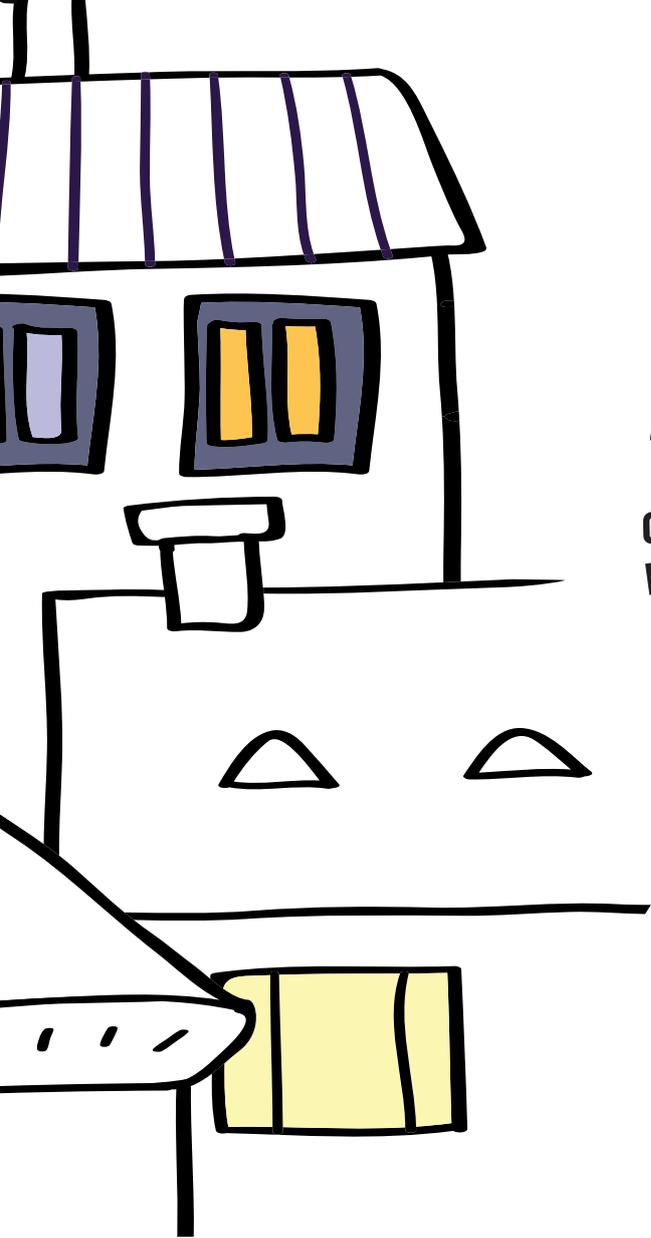

STREETLIGHTS IN GERMANY

1 NIGHT
1 MILLION
DEAD
INSECTS

10 MILLION

LESS FATAL
CASUALTIES
THANKS TO LED



A field survey was carried out in 2010 over 18 nights concerning six different road lighting installations and their level of attraction to nocturnally active insects. The luminaires are mainly flown to by butterflies and dipterous insects with a size less than 2mm. An LED light source with a colour temperature of 3000 K proved to be least attractive for the insects, luring an average of 40 organisms each night. Double the amount were attracted by LEDs with 6000 K. HCI-TT high pressure metal halide lamps (3000 K) had the poorest performance with around 370 insects per night. Wavelengths attractive for insects occur less in the

spectrum of LED light sources, and more precise light control is also possible with LED luminaires. This means less light pollution that attracts insects.

LED light is therefore significantly more insect-friendly. This is an ecological benefit of outdoor LED lighting, but is also interesting for interiors – LED light sources attract less insects into offices and residential rooms in warm summer nights with open windows.

P

H

The "Hidden Places" project consists of various single installations with which Philipp Geist aims to plant hidden and forgotten locations into the public consciousness again.

I

L

The lighting design prize 2013 in the light art category was awarded to Ph. Geist for his "Time Drifts" installation on the occasion of the Luminale 2012.

I

P

P

G

E

I

S

T



THE VISION OF PRETTY FICTION

Philipp Geist's impressive light installation gained global attention. He illuminated the statue of Christ in Rio de Janeiro and the Royal Palace at Bangkok. The artist often works with typography and phrases to create abstract images via multiple superimpositions and repeats in his lighting installations and projection art. Philipp Geist has already implemented many light installations and exhibitions around the world.

In 2014 he created a video-mapping installation on the Prellerhaus and West Bridge on the occasion of the colour celebrations at the Dessau Bauhaus. The project artistically integrated quotes and terms from Oskar Schlemmer's texts and figurine-like works. Geometric, spatial shapes such as squares, cubes, interrupted surfaces, lines and rays were superimposed as part of a continual process. They came together to create an overall image to be dispersed a moment later, and complex image architectures were created that were constantly in a state of flow.


In October 2015 Philipp Geist displayed his full-covering, painterly "Gate of Words" video mapping installation on the Azadi Tower in Tehran, Iran over a period of three days. He projected coloured words and phrases about the topics of peace, freedom, space and time in various languages, together with abstract image compositions, onto this landmark of the modern city of Tehran. Visitors themselves became a part of the video mapping installation and were also able to previously send in their associations about the themes.



PHILIPP GEIST STUDIO

Web: www.videogeist.de

E-Mail: mail@videogeist.de

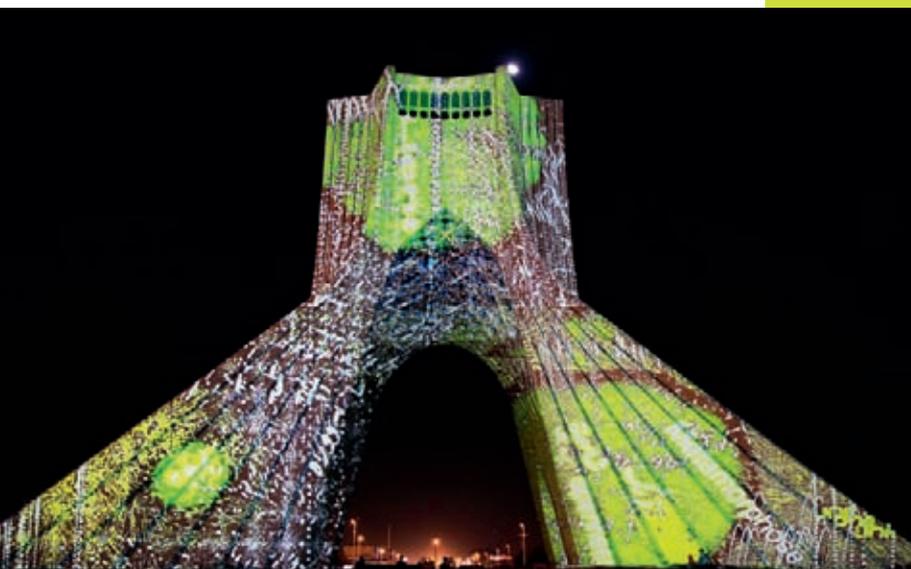

Azadi Tower, Teheran, 2015





MAXIMUM VISUAL COMFORT
FOR CHALLENGING TASKS



WHEN SETTING UP AND OPERATING PLACES OF WORK, MINIMUM ILLUMINANCE VALUES MUST BE COMPLIED IN ACCORDANCE WITH APPROPRIATE TECHNICAL REGULATIONS. BECAUSE DAYLIGHT IS NOT ALWAYS AVAILABLE IN SUFFICIENT QUANTITIES IN TERMS OF LOCATION AND TIME, SUPPLEMENTARY ARTIFICIAL LIGHTING IS NEEDED TO ENSURE THE HEALTH AND SAFETY OF EMPLOYEES. IT'S A MATTER OF ENABLING IDEAL VISION AND AVOIDING ANY RISK OF ACCIDENTS OR INJURY TO HEALTH. THE DEMANDS MADE ON LIGHTING CAN BE DIFFERENT IN ACCORDANCE WITH THE VISUAL TASK AND THE VARIOUS FIELDS OF ACTIVITY, BUT THE AIM IS ALWAYS TO ENABLE THE EFFECTIVE, EFFICIENT MASTERING OF THE WORK TASK AND EXCLUDE EXCESSIVE STRAIN ON THE EYES.

SUFFICIENT LIGHT ACHIEVES POSITIVE EFFECTS ON HEALTH, WORK PERFORMANCE AND SATISFACTION OF THE WORKERS, AND THEREFORE LONG-TERM BENEFITS IN TERMS OF QUALITATIVE WORK RESULTS.

IN ACTION WE SHOW DIVERSITY AT ARCHITECT@WORK

ARCHITECT@WORK is the name of an internationally successful exhibition format designed exclusively for architects, interior designers, engineering consultancies and other planning bodies. Around 200 selected producers present themselves according to a specific topic across various towns and cities, demonstrating their innovations as part of a unique exhibition layout. A framework programme is also organised with talks and special shows. Free catering, a lounge and a library create a pleasant and relaxed atmosphere.

Seeger – Technische Leuchten participated in ARCHITECT@WORK 2015 in Düsseldorf with resounding success. We will also be participating in the future at various exhibition locations.



Important topics on the Seeger - Technische Leuchten fair stand were colour rendering and colour temperature.


Colour rendition

The provision of natural colour rendition is an important aspect of good lighting and an important quality characteristic of light. Artificial light should ensure the truest colour rendition possible. This is measured using the colour rendition properties. The Colour Rendering Index (CRI) is used for characterisation. The larger the colour rendering index, CRI or Ra value, the more natural the colours that are reproduced

Colour temperature

The colour of light from a lamp is described by the colour temperature in Kelvin (K). Sunlight does not have a constant colour temperature. Its colour changes depending on the latitude, time of day and time of year. By using different colour temperatures, it is possible to influence the ambience and the feeling of wellbeing. This makes it possible, right from the design stage, to specify whether areas have a warm or cool appearance, allowing rest areas and work areas to be defined in advance.



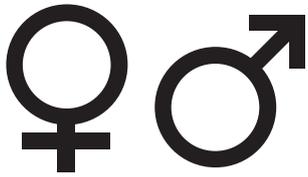



MEN'S VIEWS ARE DIFFERENT

Men and women see the world in a different way, at least when it comes down to colours. This is indicated by genetic analyses carried out by American researchers. The scientists found a surprising number of variants in the gene containing information for the red optical pigment. Because this is located on the X chromosome, the unusual diversity is noticed especially with women and helps them to achieve a somewhat higher colour differentiation capacity.

The differences between male and female test subjects were also the result of a colour test in which the researchers showed the subjects a light point in a particular colour. The observers described and specified the colour tone and what percentage of red, green, blue or yellow light the light point contained. In a further survey the test subjects were asked to adjust a colour surface so that it corresponds precisely to the colour tone of a comparative surface. The sensitivity with regard to colour tones was approximately equal for both genders, but not congruent according to the researchers.

Across almost the complete colour spectrum the men perceived the colour tones to be slightly more blueish than the women – ladies see the world in warmer tones.

Differences between the genders also exist with respect to their favourite colour – as the result of a questionnaire, more than half the men specified blue as their favourite colour. Women on the other hand tended towards more reddish blue tones. Might causes for such preferences be found in prehistoric times when people existed as hunters and collectors? Positive associations with the colour blue might be derived from the sky, presupposing no danger from bad weather conditions. Blue water could also be drunk without risk. The skilled differentiation of various red tones may have helped women in their search for ripe fruits and other edible plant parts. Another reason for this heightened level of perception is possible in a special sensitivity for the moods of people with their slightly changed facial tones.

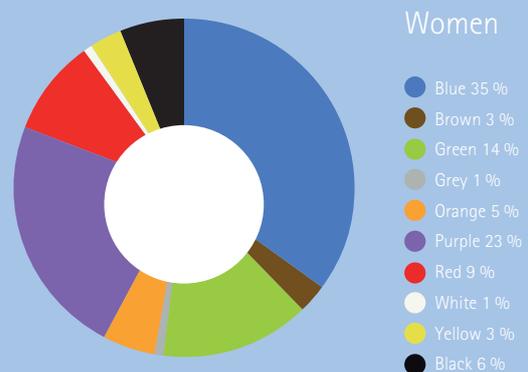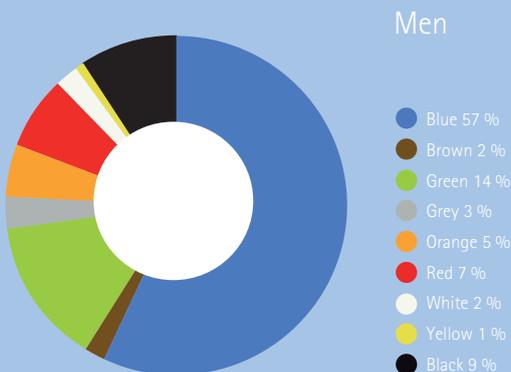









DE SENWASS

Pendant systems





LED Lighting unit

The luminaire inserts are equipped with COB ceramic technology LEDs. The use of this new technology increases not only the efficiency of the LEDs but also maximises the service life. Due to minimum luminous flux reduction of L90B10 at 50,000 hours service life and low 3MacAdam colour tolerance, these products are ideal for use in projects with especially long operating periods.

Reflector system

The luminaire modules feature special, highly diffuse reflectors. This innovative reflector technology achieves maximum efficiency and uniform, shadowless illumination.

Construction lengths

To avoid shadows in the profile covers, the LED modules are butted seamlessly together. The module grid size is 281mm. Modules are available from 1-length to 6-length.

Control gear

Precisely matched electronic control units supply the LED modules. The systems are available in either static or regulable versions. A DALI, Push or 1-10V interface can be specified according to requirements.



Profile luminaires

Luminaires and lighting systems made of extruded aluminium profile are indispensable for meeting the high demands of contemporary architecture. The outstanding thermal characteristics of the material and the possibility of integrating functional properties into the profile enable the development of luminaires with extremely compact dimensions and high performance potential. The high rigidity of the profiles also enables long luminaire lengths with just a few mounting points and low weight.




Dual light

Spotlight inserts are available for scenatic lighting. Various light atmospheres can be created by using different light sources – diffuse or point-precise light as a twin function in the luminaire. General light generated by LEDs is complemented with the individually switchable and controllable supplementary lighting.

Spotlight units

High vertical accenting is achieved by combining with modules accommodating rigid or adjustable spotlight units. Various spotlight inserts are available for supplementary lighting.




Fixed spotlight inserts




Adjustable spotlight inserts



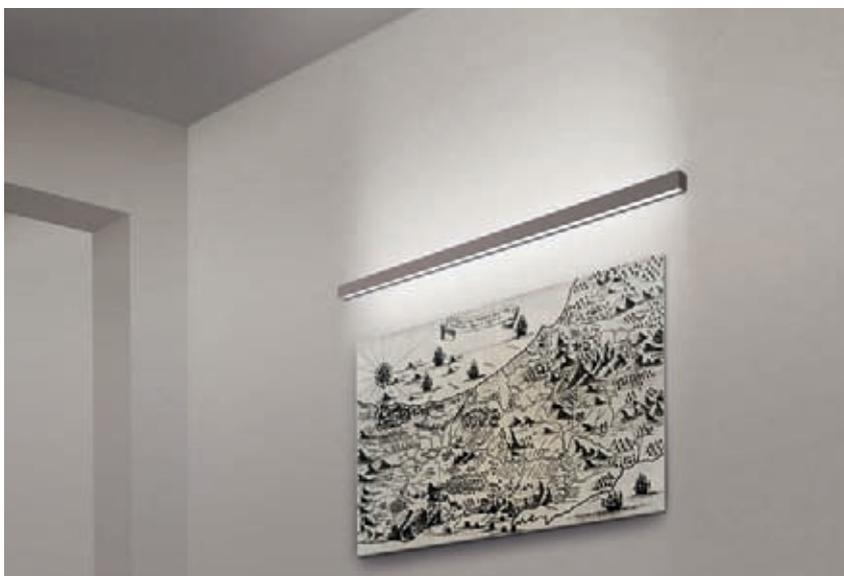

**LED RAIL wall luminaire**

The compact size makes this crisp-edged aluminium profile an inconspicuous architectural detail. The versatility of the lighting technology makes it universally useable, being equally suited for illuminating office and functional areas and for prestigious architecture. Many special functions are possible and can be optimised for the project.

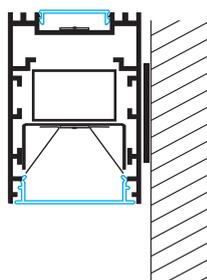
**LED RAIL surface-mounted luminaire**

Multifunctional luminaire with strict geometric shape, stripped to the bare essentials, for surface mounting on the ceiling. Despite its filigree design, this product is equipped with state-of-the-art lighting technology and electronics, making it a powerful and highly efficient package. Many special functions are possible and can be optimised for the project.


LED RAIL Pendant



9563... opal



9564... prismatic, clear

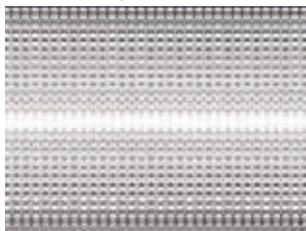
















LED RAIL pendant luminaire

- › direct light emission
- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › suspension system B or E
- › LED COB array, L90/B10 – 50000 h

› Small Flux LED type 03

› Mid Flux LED type 04

› High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---|---|---------|----------|---------|---------|---------|---------|-------|
| H 100  |  OD 68 x 575 |  | 95632 | 03 | 1200 lm | 1250 lm | 1280 lm | 1330 lm | 15 W |
| | | | | 04 | 1690 lm | 1750 lm | 1790 lm | 1850 lm | 20 W |
| | | | | 05 | 2300 lm | 2390 lm | 2440 lm | 2540 lm | 28 W |
| H 100  |  OD 68 x 870 |  | 95633 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| H 100  |  OD 68 x 1150 |  | 95634 | 03 | 2410 lm | 2500 lm | 2560 lm | 2660 lm | 25 W |
| | | | | 04 | 3380 lm | 3500 lm | 3580 lm | 3700 lm | 36 W |
| | | | | 05 | 4600 lm | 4780 lm | 4890 lm | 5080 lm | 52 W |
| H 100  |  OD 68 x 1430 |  | 95635 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| H 100  |  OD 68 x 575 |  | 95642 | 03 | 1440 lm | 1500 lm | 1540 lm | 1590 lm | 15 W |
| | | | | 04 | 2030 lm | 2100 lm | 2150 lm | 2230 lm | 20 W |
| | | | | 05 | 2760 lm | 2870 lm | 2940 lm | 3050 lm | 28 W |
| H 100  |  OD 68 x 870 |  | 95643 | 03 | 2170 lm | 2250 lm | 2310 lm | 2390 lm | 20 W |
| | | | | 04 | 3040 lm | 3160 lm | 3230 lm | 3340 lm | 26 W |
| | | | | 05 | 4140 lm | 4310 lm | 4410 lm | 4580 lm | 40 W |
| H 100  |  OD 68 x 1150 |  | 95644 | 03 | 2890 lm | 3010 lm | 3080 lm | 3190 lm | 25 W |
| | | | | 04 | 4060 lm | 4210 lm | 4300 lm | 4460 lm | 36 W |
| | | | | 05 | 5530 lm | 5750 lm | 5890 lm | 6110 lm | 52 W |
| H 100  |  OD 68 x 1430 |  | 95645 | 03 | 3620 lm | 3760 lm | 3850 lm | 3990 lm | 30 W |
| | | | | 04 | 5080 lm | 5260 lm | 5380 lm | 5570 lm | 44 W |
| | | | | 05 | 6910 lm | 7190 lm | 7360 lm | 7640 lm | 64 W |

Technical changes reserved and errors excepted!


LED RAIL Pendant



9561... opal



9562... prismatic, clear

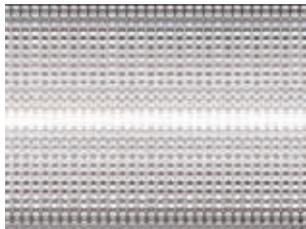

















LED RAIL pendant luminaire

- › direct/indirect light emission
- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › suspension system B or E
- › LED COB array, L90/B10 – 50000 h

› Small Flux LED type 03

› Mid Flux LED type 04

› High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---|---|---------|----------|----------|----------|----------|----------|-------|
| H 100  |  OD 68 x 575 |  | 95612 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| H 100  |  OD 68 x 870 |  | 95613 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| H 100  |  OD 68 x 1150 |  | 95614 | 03 | 3610 lm | 3750 lm | 3840 lm | 3990 lm | 36 W |
| | | | | 04 | 5070 lm | 5250 lm | 5370 lm | 5560 lm | 52 W |
| | | | | 05 | 6900 lm | 7180 lm | 7340 lm | 7620 lm | 76 W |
| H 100  |  OD 68 x 1430 |  | 95615 | 03 | 4820 lm | 5000 lm | 5130 lm | 5320 lm | 50 W |
| | | | | 04 | 6760 lm | 7010 lm | 7160 lm | 7410 lm | 72 W |
| | | | | 05 | 9200 lm | 9570 lm | 9790 lm | 10170 lm | 104 W |
| H 100  |  OD 68 x 575 |  | 95622 | 03 | 2170 lm | 2250 lm | 2310 lm | 2390 lm | 20 W |
| | | | | 04 | 3040 lm | 3160 lm | 3230 lm | 3340 lm | 28 W |
| | | | | 05 | 4140 lm | 4310 lm | 4410 lm | 4580 lm | 40 W |
| H 100  |  OD 68 x 870 |  | 95623 | 03 | 3620 lm | 3760 lm | 3850 lm | 3990 lm | 30 W |
| | | | | 04 | 5080 lm | 5260 lm | 5380 lm | 5570 lm | 44 W |
| | | | | 05 | 6910 lm | 7190 lm | 7360 lm | 7640 lm | 64 W |
| H 100  |  OD 68 x 1150 |  | 95624 | 03 | 4340 lm | 4510 lm | 4620 lm | 4790 lm | 36 W |
| | | | | 04 | 6090 lm | 6320 lm | 6460 lm | 6690 lm | 52 W |
| | | | | 05 | 8290 lm | 8630 lm | 8830 lm | 9170 lm | 76 W |
| H 100  |  OD 68 x 1430 |  | 95625 | 03 | 5790 lm | 6020 lm | 6170 lm | 6390 lm | 50 W |
| | | | | 04 | 8130 lm | 8430 lm | 8610 lm | 8920 lm | 72 W |
| | | | | 05 | 11060 lm | 11510 lm | 11780 lm | 12230 lm | 104 W |

Technical changes reserved and errors excepted!


LED RAIL surface-mounted



1831... opal



1830... prismatic, clear







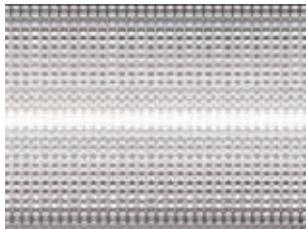


LED RAIL surface-mounted luminaire

- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › prepared for mounting system M

› LED COB array, L90/B10 – 50000 h

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power | |
|-------|---|---|---|----------|--------|---------|---------|---------|---------|------|
| H 100 |  |  OD 68 x 575 |  | 18312 | 03 | 1200 lm | 1250 lm | 1280 lm | 1330 lm | 15 W |
| | | | | | 04 | 1690 lm | 1750 lm | 1790 lm | 1850 lm | 20 W |
| | | | | | 05 | 2300 lm | 2390 lm | 2440 lm | 2540 lm | 28 W |
| H 100 |  |  OD 68 x 870 |  | 18313 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | | | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | | | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| H 100 |  |  OD 68 x 1150 |  | 18314 | 03 | 2410 lm | 2500 lm | 2560 lm | 2660 lm | 25 W |
| | | | | | 04 | 3380 lm | 3500 lm | 3580 lm | 3700 lm | 36 W |
| | | | | | 05 | 4600 lm | 4780 lm | 4890 lm | 5080 lm | 52 W |
| H 100 |  |  OD 68 x 1430 |  | 18315 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | | | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | | | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| H 100 |  |  OD 68 x 575 |  | 18302 | 03 | 1440 lm | 1500 lm | 1540 lm | 1590 lm | 15 W |
| | | | | | 04 | 2030 lm | 2100 lm | 2150 lm | 2230 lm | 20 W |
| | | | | | 05 | 2760 lm | 2870 lm | 2940 lm | 3050 lm | 28 W |
| H 100 |  |  OD 68 x 870 |  | 18303 | 03 | 2170 lm | 2250 lm | 2310 lm | 2390 lm | 20 W |
| | | | | | 04 | 3040 lm | 3160 lm | 3230 lm | 3340 lm | 28 W |
| | | | | | 05 | 4140 lm | 4310 lm | 4410 lm | 4580 lm | 40 W |
| H 100 |  |  OD 68 x 1150 |  | 18304 | 03 | 2890 lm | 3010 lm | 3080 lm | 3190 lm | 25 W |
| | | | | | 04 | 4060 lm | 4210 lm | 4300 lm | 4460 lm | 36 W |
| | | | | | 05 | 5530 lm | 5750 lm | 5890 lm | 6110 lm | 52 W |
| H 100 |  |  OD 68 x 1430 |  | 18305 | 03 | 3620 lm | 3760 lm | 3850 lm | 3990 lm | 30 W |
| | | | | | 04 | 5080 lm | 5260 lm | 5380 lm | 5570 lm | 44 W |
| | | | | | 05 | 6910 lm | 7190 lm | 7360 lm | 7640 lm | 64 W |


Technical changes reserved and errors excepted!



opal



prismatic, clear

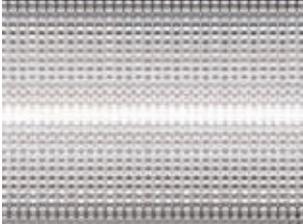

LED RAIL wall luminaire


- › direct or direct/indirect emission
- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available powder-coated in accordance with RAL
- › cover available in acrylic opal or prismatic
- › prepared for mounting system M
- › LED COB array, L90/B10 – 50000 h

› Small Flux LED type 03

› Mid Flux LED type 04

› High Flux LED type 05

► Lumen values apply for opal covers. Prismatic cover on request.


| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---------|----------|---------|---------|---------|----------|-------|
| H 100   OD 68 x 575  | 84432 | 03 | 1200 lm | 1250 lm | 1280 lm | 1330 lm | 15 W |
| | | 04 | 1690 lm | 1750 lm | 1790 lm | 1850 lm | 20 W |
| | | 05 | 2300 lm | 2390 lm | 2440 lm | 2540 lm | 28 W |
| H 100   OD 68 x 870  | 84433 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| H 100   OD 68 x 1150  | 84434 | 03 | 2410 lm | 2500 lm | 2560 lm | 2660 lm | 25 W |
| | | 04 | 3380 lm | 3500 lm | 3580 lm | 3700 lm | 36 W |
| | | 05 | 4600 lm | 4780 lm | 4890 lm | 5080 lm | 52 W |
| H 100   OD 68 x 1430  | 84435 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| H 100   OD 68 x 575  | 84412 | 03 | 1800 lm | 1870 lm | 1920 lm | 1990 lm | 20 W |
| | | 04 | 2530 lm | 2620 lm | 2680 lm | 2780 lm | 28 W |
| | | 05 | 3450 lm | 3590 lm | 3670 lm | 3810 lm | 40 W |
| H 100   OD 68 x 870  | 84413 | 03 | 3010 lm | 3130 lm | 3200 lm | 3320 lm | 30 W |
| | | 04 | 4220 lm | 4380 lm | 4470 lm | 4630 lm | 44 W |
| | | 05 | 5750 lm | 5980 lm | 6120 lm | 6350 lm | 64 W |
| H 100   OD 68 x 1150  | 84414 | 03 | 3610 lm | 3750 lm | 3840 lm | 3990 lm | 36 W |
| | | 04 | 5070 lm | 5250 lm | 5370 lm | 5560 lm | 52 W |
| | | 05 | 6900 lm | 7180 lm | 7340 lm | 7620 lm | 76 W |
| H 100   OD 68 x 1430  | 84415 | 03 | 4820 lm | 5000 lm | 5130 lm | 5320 lm | 50 W |
| | | 04 | 6760 lm | 7010 lm | 7160 lm | 7410 lm | 72 W |
| | | 05 | 9200 lm | 9570 lm | 9790 lm | 10170 lm | 104 W |

LED RAIL Profiles

System luminaires


With LED RAIL system luminaires, system components are compiled according to project needs. This enables continuous light channel systems matched to the architecture. The modular selection of system components enables lighting solutions accor-

ding to the specific designs of the lighting designer. Detailed planning of the system can be directly and simply implemented. Functional additions can also be subsequently installed with ease.

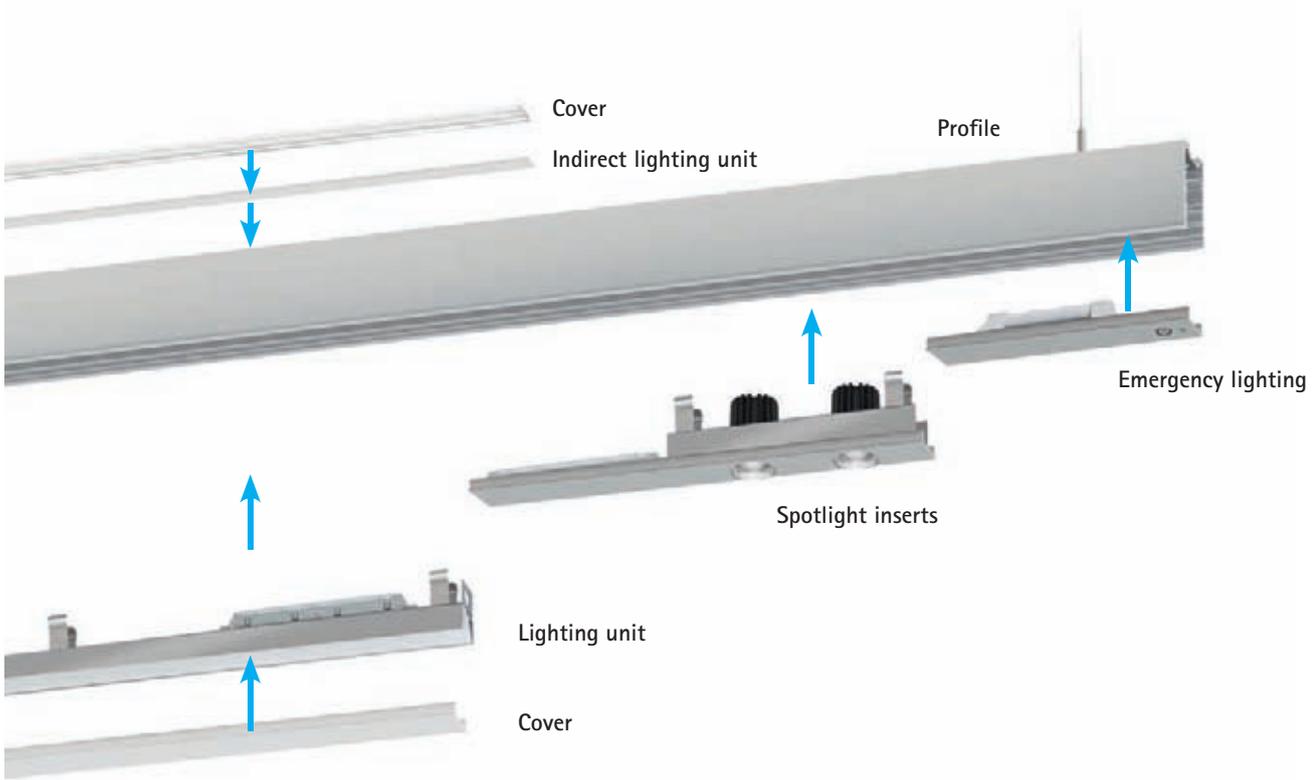

An empty profile is suspended and can be retroactively configured with a wide variety of luminaire inserts. To achieve seamless, shadow-free illumination, light inserts are butted together. Light-distributing diffusers with opal, satin matt surfaces form the termination of the luminaire. Despite high transmission, the luminaire cover is uniformly illuminated without points or shadows. Luminaire covers are also available with a microprismatic surface. The mi-

croprisms achieve effective glare control. These covers are suitable for the standard-compliant illumination of DSE workstations. The light channels can also accommodate spotlights, blank elements and technical elements. The channels also have sufficient space for cable runs.

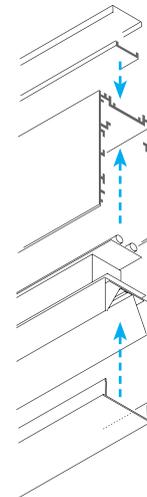

Luminaire profiles







- › profiles for suspension
- › direct or direct/indirect emission
- › made of sharp-edged extruded aluminium sheath
- › surface anodized aluminium
- › surface also available in powder-coated in accordance with RAL
- › supply dimensions freely specifiable to 6 m
- › millimetre-precise cuts

Opal cover

- › for the planar lighting of general areas
- › uniform, shadow-free illuminated surface
- › high transmission factor
- › diffuse light distribution

Prismatic cover

- › for standard-compliant illumination of DSE workstations
- › cover available in acrylic opal or prismatic
- › high brilliance with glare-free light
- › uniform appearance of light

| Profiles | |
|--|---|
|  | H = 100 B = 68 |
|  | H = 100 B = 68 |
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |
| <hr/> Profiles | |
| Direct emission 17600.xxx Luminaire profile, empty in xxx cm 17601.000 Sawed cutting | |
| <hr/> Direct / indirect emission 17690.xxx Luminaire profile, empty in xxx cm 17601.000 Sawed cutting | |
| <hr/> Cover | |
| Acrylic Diffusor, opal 17640.xxx Cover in xxx cm 17601.000 Sawed cutting | |
| <hr/> Microprismatic, clear 17660.xxx Cover in xxx cm 17601.000 Sawed cutting | |
| <hr/> Microprismatic, opal 17670.xxx Cover in xxx cm 17601.000 Sawed cutting | |
| <hr/> Blank cover, aluminium 17650.xxx Cover in xxx cm 17601.000 Sawed cutting | |
| <hr/> Microprismatic, clear (für uplight) 17680.xxx Cover in xxx cm 17601.000 Sawed cutting | |

LED RAIL lighting units








LED lighting units, direct emission



- › luminaire modules for installing in empty profiles
- › reflectors for homogeneous, shadow-free illumination
- › 281 mm module dimensions
- › modules available from 1-length to 6-length
- › control units optionally static or regulable

› LED COB array, L90/B10 – 50000 hrs

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|--|---------|----------|---------|---------|---------|---------|-------|
|   L 281 | 17711 | 03 | 770 lm | 800 lm | 820 lm | 850 lm | 10 W |
| | | 04 | 1080 lm | 1120 lm | 1145 lm | 1185 lm | 12 W |
| | | 05 | 1470 lm | 1530 lm | 1565 lm | 1625 lm | 16 W |
|   L 562 | 17712 | 03 | 1540 lm | 1600 lm | 1640 lm | 1700 lm | 15 W |
| | | 04 | 2160 lm | 2240 lm | 2290 lm | 2370 lm | 20 W |
| | | 05 | 2940 lm | 3060 lm | 3130 lm | 3250 lm | 28 W |
|   L 843 | 17713 | 03 | 2310 lm | 2400 lm | 2460 lm | 2550 lm | 20 W |
| | | 04 | 3240 lm | 3360 lm | 3435 lm | 3555 lm | 28 W |
| | | 05 | 4410 lm | 4590 lm | 4695 lm | 4875 lm | 40 W |
|   L 1124 | 17714 | 03 | 3080 lm | 3200 lm | 3280 lm | 3400 lm | 25 W |
| | | 04 | 4320 lm | 4480 lm | 4580 lm | 4740 lm | 36 W |
| | | 05 | 5880 lm | 6120 lm | 6260 lm | 6500 lm | 52 W |
|   L 1405 | 17715 | 03 | 3850 lm | 4000 lm | 4100 lm | 4250 lm | 30 W |
| | | 04 | 5400 lm | 5600 lm | 5725 lm | 5925 lm | 44 W |
| | | 05 | 7350 lm | 7650 lm | 7825 lm | 8125 lm | 64 W |
|   L 1686 | 17716 | 03 | 4620 lm | 4800 lm | 4920 lm | 5100 lm | 36 W |
| | | 04 | 6480 lm | 6720 lm | 6870 lm | 7110 lm | 52 W |
| | | 05 | 8820 lm | 9180 lm | 9390 lm | 9750 lm | 76 W |

LED lighting units, indirect emission








- › luminaire modules for installing in empty profiles
- › reflectors for homogeneous, shadow-free illumination
- › 281 mm module dimensions
- › modules available from 1-length to 6-length
- › control units optionally static or regulable

› LED COB array, L90/B10 – 50000 hrs

› Small Flux LED type 03

› Mid Flux LED type 04

› High Flux LED type 05


| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---------|----------|---------|---------|---------|---------|-------|
|   | 17791 | 03 | 770 lm | 800 lm | 820 lm | 850 lm | 10 W |
| | | 04 | 1080 lm | 1120 lm | 1145 lm | 1185 lm | 12 W |
| | | 05 | 1470 lm | 1530 lm | 1565 lm | 1625 lm | 16 W |
|   | 17792 | 03 | 1540 lm | 1600 lm | 1640 lm | 1700 lm | 15 W |
| | | 04 | 2160 lm | 2240 lm | 2290 lm | 2370 lm | 20 W |
| | | 05 | 2940 lm | 3060 lm | 3130 lm | 3250 lm | 28 W |
|   | 17793 | 03 | 2310 lm | 2400 lm | 2460 lm | 2550 lm | 20 W |
| | | 04 | 3240 lm | 3360 lm | 3435 lm | 3555 lm | 28 W |
| | | 05 | 4410 lm | 4590 lm | 4695 lm | 4875 lm | 40 W |
|   | 17794 | 03 | 3080 lm | 3200 lm | 3280 lm | 3400 lm | 25 W |
| | | 04 | 4320 lm | 4480 lm | 4580 lm | 4740 lm | 36 W |
| | | 05 | 5880 lm | 6120 lm | 6260 lm | 6500 lm | 52 W |
|   | 17795 | 03 | 3850 lm | 4000 lm | 4100 lm | 4250 lm | 30 W |
| | | 04 | 5400 lm | 5600 lm | 5725 lm | 5925 lm | 44 W |
| | | 05 | 7350 lm | 7650 lm | 7825 lm | 8125 lm | 64 W |
|   | 17796 | 03 | 4620 lm | 4800 lm | 4920 lm | 5100 lm | 36 W |
| | | 04 | 6480 lm | 6720 lm | 6870 lm | 7110 lm | 52 W |
| | | 05 | 8820 lm | 9180 lm | 9390 lm | 9750 lm | 76 W |

Technical changes reserved and errors excepted!



Spotlight inserts

High vertical accenting is achieved by combining modules with fixed and adjustable spotlight units. Various spotlight inserts are available for supplementary lighting.



Adjustable spotlight inserts



Fixed spotlight inserts



Spotlight with lens optic




LED Spotlight units




- › partly made of sharp-edged extruded aluminium sheath
- › with integrated control gear
- › mounting preparation ex-works as system-integrated component
- › wired ready for connection with heat-resistant cable
- › different reflectors available

► Reflector order code:

- S = Spot
- M = Medium
- F = Flood

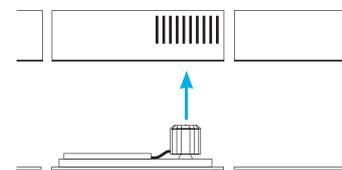

Long ventilation element for LED RAIL spotlight inserts with integrated control gear.


| | Article | Length | Lumens | Power |
|---|------------------------------|--------|------------|----------|
|  | Adjustable spotlight inserts | | | |
| | 17741 | 350 mm | 940 lm | 11 W |
| | 17742 | 450 mm | 2 x 940 lm | 2 x 11 W |
| | 17743 | 650 mm | 3 x 940 lm | 3 x 11 W |
|  | Fixed spotlight inserts | | | |
| | 17761 | 350 mm | 940 lm | 11 W |
| | 17762 | 450 mm | 2 x 940 lm | 2 x 11 W |
| | 17763 | 650 mm | 3 x 940 lm | 3 x 11 W |
|  | Spotlight with lens optic | | | |
| | 17781 | 350 mm | 940 lm | 11 W |
| | 17782 | 450 mm | 2 x 940 lm | 2 x 11 W |
| | 17783 | 650 mm | 3 x 940 lm | 3 x 11 W |

Technical changes reserved and errors excepted!

RAIL System connectors

- › numerous design possibilities
- › T-connector for expansion
- › corner connector for 90° angle
- › corner connector possible for modified angles
- › mounting systems for all ceiling systems

Example of use:

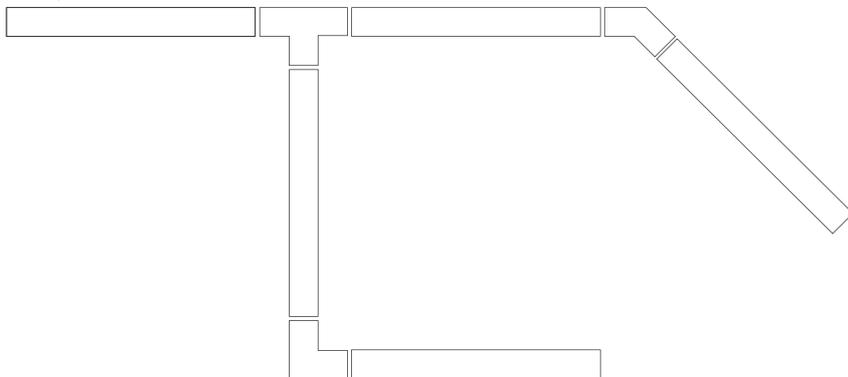

LED RAIL



End cover

Art.-No.: 17620.99



T-Connector

Art.-No.: 17620.95



L-Connector angle 90°

Art.-No.: 17620.93



L-Connector special angle

Art.-No.: 17620.90

Mounting system:



SYSTEM B

Wire rope suspension with rapid connector system




SYSTEM E


Pendant suspension for concrete ceilings

RAIL System connectors

- › numerous design possibilities
- › compensation cover for perfect fitting
- › various fixing and suspension possibilities



SYSTEM B
Wire rope suspension
with rapid connector
system



SYSTEM E
Pendant suspension
for concrete ceilings



Spacing cover
Art.-No.: 17620.98



Straight connector
Art.-No.: 17620.98



Wire-rope suspension, system B
17621.11 wire rope L = 1000 mm
17621.12 wire rope L = 2000 mm



Wire-rope suspension with canopy and cable
17621.21 wire rope L = 1000 mm
17621.22 wire rope L = 2000 mm



Through-wiring, 3-pole
17703.04 for LED RAIL 400 mm
17703.10 for LED RAIL 1000 mm
17703.20 for LED RAIL 2000 mm
17703.30 for LED RAIL 3000 mm



Through-wiring, 5-pole
17705.04 for LED RAIL 400 mm
17705.10 for LED RAIL 1000 mm
17705.20 for LED RAIL 2000 mm
17705.30 for LED RAIL 3000 mm




PROJECT

WE MAKE VISIONS VISIBLE

Office 01, floorstanding uplight

Highly efficient floorstanding uplight with LED technology. Absolutely glare-free, homogeneous and wide distribution of light.

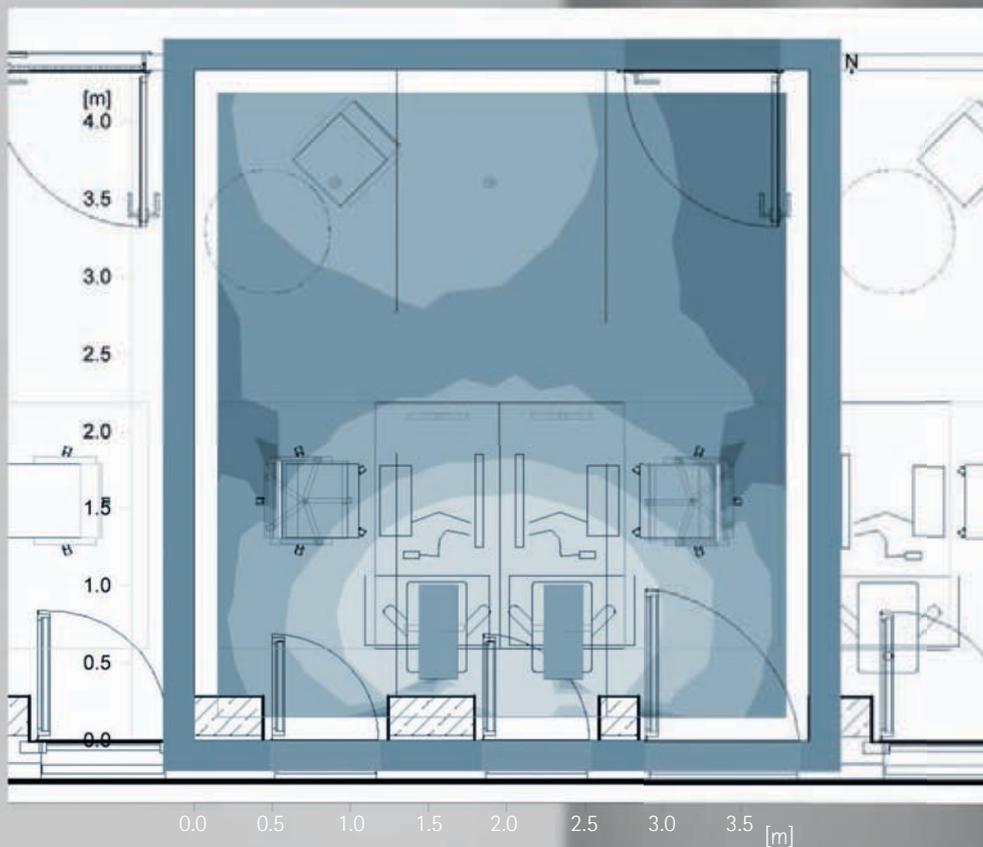

Height of reference level
Average illuminance
Minimum illuminance
Maximum illuminance
Constancy U_0
Unevenness U_d

: 0.80 m
 E_m : 656 lx
 E_{min} : 151 lx
 E_{max} : 2130 lx
 E_{min}/E_m : 1 : 4.34 (0.23)
 E_{min}/E_{max} : 1 : 14.12 (0.07)



A sharp-edged, angular and linear design combined with a focus on efficiency and usability are the aspects defining the luminaires of the OFFICE range.

Adapted specifically for the requirements of offices and the people working in these, the following luminaires can be combined with each other to create an overall, consistent corporate image for your company. Optimum reflectors and precisely calculated photometrics ensure a pleasant work atmosphere without negative factors such as fatigue, disturbing glare or reflections and undesired shadowing on walls.







LED OFFICE 01 floorstanding upright

Angular linearity typifies the design of the OFFICE 01 floor lamp. The luminaire has particularly high performance thanks to state-of-the-art optics and configuration with maximum quality LED arrays. The direct/indirect distribution upright is ideal for office applications, both for general and workstation lighting. Completely glare-free uniform wide light distribution due to the microprismatic cover for the direct component, with a high quality light emission surface appearance thanks to a covering of optical real glass..

Indirect light emission surface with LED arrays with ceramic technology, cover of safety glass.






LED OFFICE 01 Pendant luminaire

The pendant luminaire of the OFFICE series is a high-output and extremely efficient lighting tool, ideal for the special requirements of office environments. The design and functionality of the OFFICE 01 upright were referenced and modified for DSE workstations. The dimming function enables light to be adapted to daylight levels, thus ensuring a uniform quality of light on the desk surface and in the work surroundings.

This increases the performance capacity of employees and also prevents fatigue. The direct and indirect light emission combined with a microprismatic cover generates shadowless and glare-free lighting that is therefore also suitable for general office lighting.



Luminaire with direct/indirect emission, equipped with LED-Arrays in COB (Chip-on-board) technology. Above 100 lm/W and outstanding long durability. L90/B10 - 50000 hrs, 3 Step MacAdam, CRI > 84.



Direct light emission



Indirect light emission



LED OFFICE 02


This model is an uplight with indirect light distribution only. The walls and ceilings of the room serve as reflection surfaces. The high luminaire luminous flux levels generate standard-compliant illuminance for the workstation lighting. The OFFICE 02 is especially suitable as general or supplementary lighting thanks to complete lack of glare and planar illumination.

The more angular design of this uplight compared to the OFFICE 01 range has a calm appearance and blends discreetly into the background without disturbing the room ambience. This means that more complex luminaire elements such as pendant or recessed luminaires can be done without – a logical and attractive solution without compromise, especially for small office spaces.





Direct dimming by pressing a button on the luminaire head. The luminous intensity is reliably set in this way to adapt the luminaire to the time of day and specific requirement. Indirect lighting technology with Chip On Board LED arrays with ceramic technology. The luminaires are 1-piece and wired ready for connection. The electronic components are integrated.

Wide-area illumination

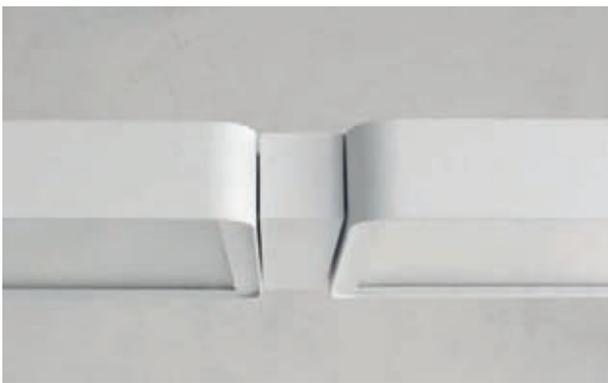

The suspended luminaire in the OFFICE range creates pleasant general lighting in offices. Equipped with a prismatic cover for direct light distribution and an opal cover for the indirect component, this luminaire emits its light uniformly across a wide area. Direct glare is prevented, an ideal prerequisite for DSE workstations. Shadowing and blurred arcs of light on illuminated walls are avoided. Dimmability allows the light appearance to be steplessly adapted, enabling fatigue-free work throughout the day.

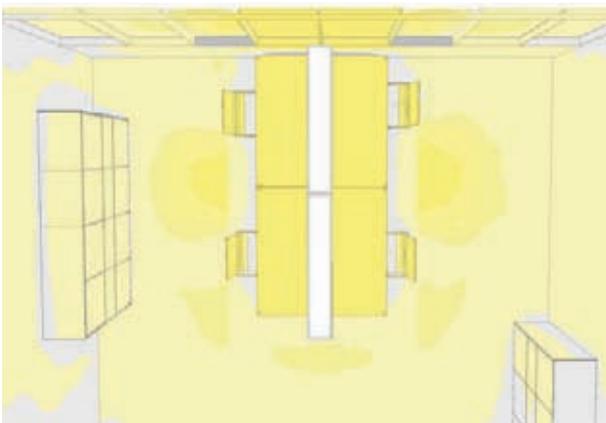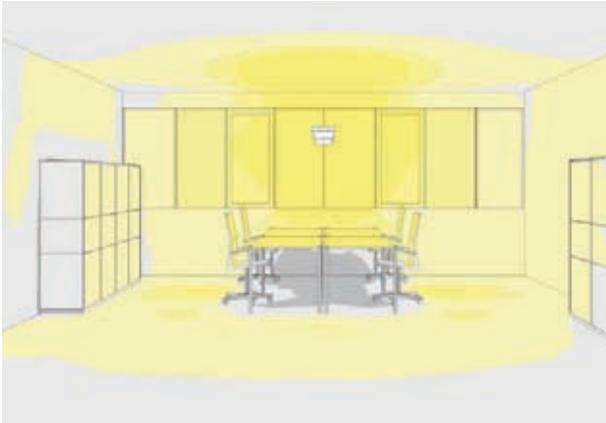

Design example:








The specification was to illuminate the office area and the four opposite workstations as efficiently as possible. We meet this requirement with just two suspended luminaires forming a fixed unit via a connector. The light is transmitted smoothly to walls, cupboards and work planes without causing glare for users and without creating shadows.




OFFICE 01 pendant luminaire

- › direct/indirect light emission
- › made of sharp-edged extruded aluminium sheath
- › surface powder-coated
- › cover available in acrylic opal or prismatic
- › suspension system B or E
- › LED COB array, L90/B10 – 50000 h

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power | |
|------|---|---|---|----------|--------|----------|----------|----------|----------|-------|
| H 45 |  |  |  | 70103 | 03 | 4340 lm | 4510 lm | 4620 lm | 4790 lm | 36 W |
| | | | | | 04 | 6090 lm | 6320 lm | 6460 lm | 6690 lm | 52 W |
| | | | | | 05 | 8290 lm | 8630 lm | 8830 lm | 9170 lm | 76 W |
| | | | | | | | | | | |
| H 45 |  |  |  | 70104 | 03 | 5790 lm | 6020 lm | 6170 lm | 6390 lm | 50 W |
| | | | | | 04 | 8130 lm | 8430 lm | 8610 lm | 8920 lm | 72 W |
| | | | | | 05 | 11060 lm | 11510 lm | 11780 lm | 12230 lm | 104 W |
| | | | | | | | | | | |
| H 45 |  |  |  | 70105 | 03 | 7240 lm | 7520 lm | 7710 lm | 7990 lm | 60 W |
| | | | | | 04 | 10160 lm | 10530 lm | 10770 lm | 11150 lm | 87 W |
| | | | | | 05 | 13830 lm | 14390 lm | 14720 lm | 15290 lm | 125 W |
| | | | | | | | | | | |
| H 45 |  |  |  | 70106 | 03 | 8690 lm | 9030 lm | 9250 lm | 9590 lm | 71 W |
| | | | | | 04 | 12190 lm | 12640 lm | 12920 lm | 13380 lm | 103 W |
| | | | | | 05 | 16590 lm | 17270 lm | 17670 lm | 18340 lm | 149 W |


Technical changes reserved and errors excepted!

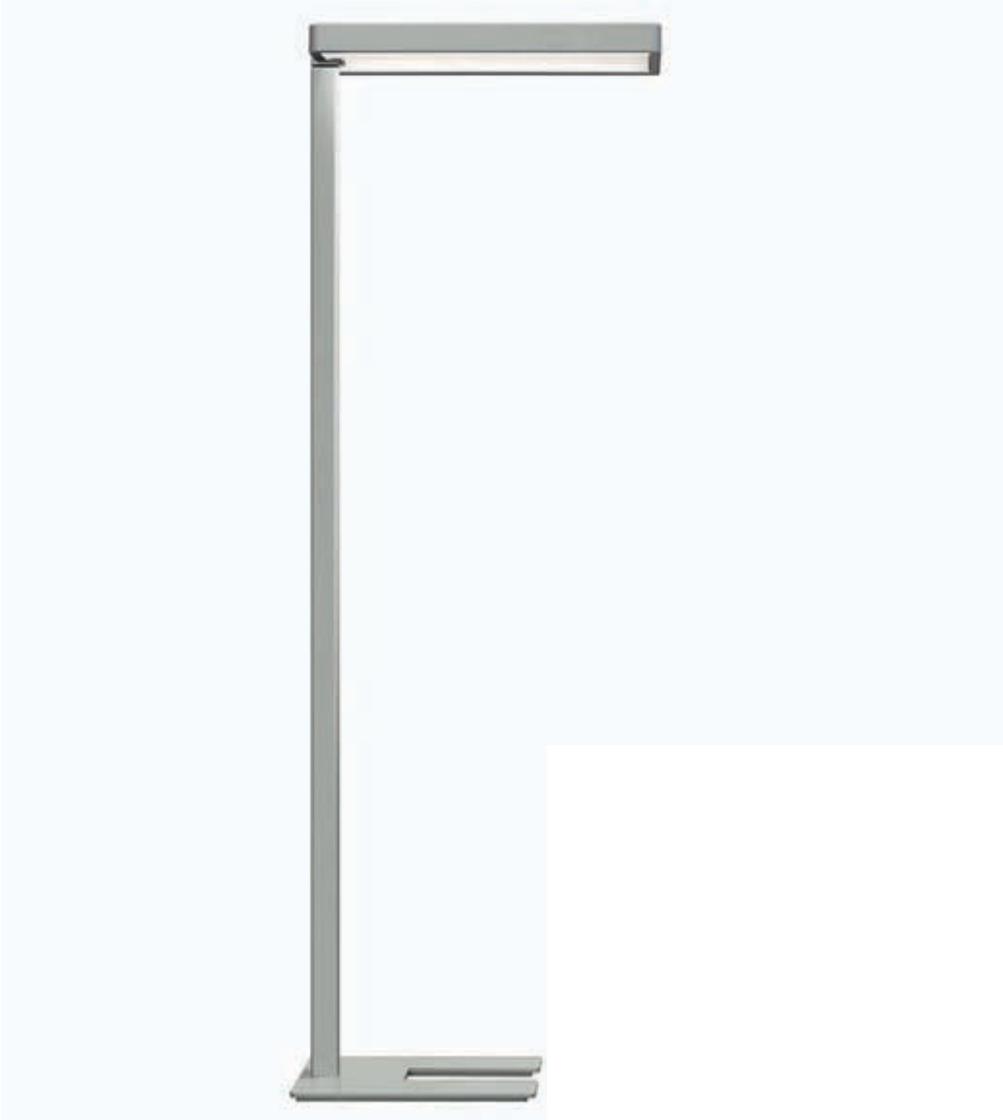

OFFICE 01 floorstanding upright

- › direct/indirect light emission
- › luminaire housing made of aluminium and steel
- › surface powder-coated
- › direct prismatic cover
- › indirect clear genuine glass cover
- › completely closed luminaire
- › ready-to-connect wiring
- › LED COB array, L90/B10 – 50000 h

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

| | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power |
|---|---------|----------|----------|----------|----------|----------|-------|
|  | 71100 | 03 | 5790 lm | 6020 lm | 6170 lm | 6390 lm | 49 W |
| | | 04 | 8130 lm | 8430 lm | 8610 lm | 8920 lm | 73 W |
| | | 05 | 11060 lm | 11510 lm | 11780 lm | 12230 lm | 92 W |




Technical changes reserved and errors excepted!



OFFICE 02 floorstanding uplight

- › indirect light emission
- › luminaire housing made of aluminium and steel
- › surface powder-coated
- › glare-free and flat lighting
- › ceiling and wall used as reflection surface
- › ready-to-connect wiring
- › LED COB array, L90/B10 – 50000 h

- › Small Flux LED type 03
- › Mid Flux LED type 04
- › High Flux LED type 05

| | | | Article | LED type | 2700 K | 3000 K | 3500 K | 4000 K | Power | |
|--------|---|---|---|----------|--------|---------|---------|---------|---------|------|
| H 1945 |  |  |  | 97200 | 03 | 2890 lm | 3010 lm | 3080 lm | 3190 lm | 25 W |
| | | | | | 04 | 4060 lm | 4210 lm | 4300 lm | 4460 lm | 36 W |
| | | | | | 05 | 5530 lm | 5750 lm | 5890 lm | 6110 lm | 52 W |

Technical changes reserved and errors excepted!




Seeger proves its sense for design with this luminaire range.

The light unit in the form of a ring achieves a high recognition factor with its wall-, suspended- and floorstanding upright versions. Thanks to its timeless, functional design the light ring can also be integrated into a wide variety of interiors.







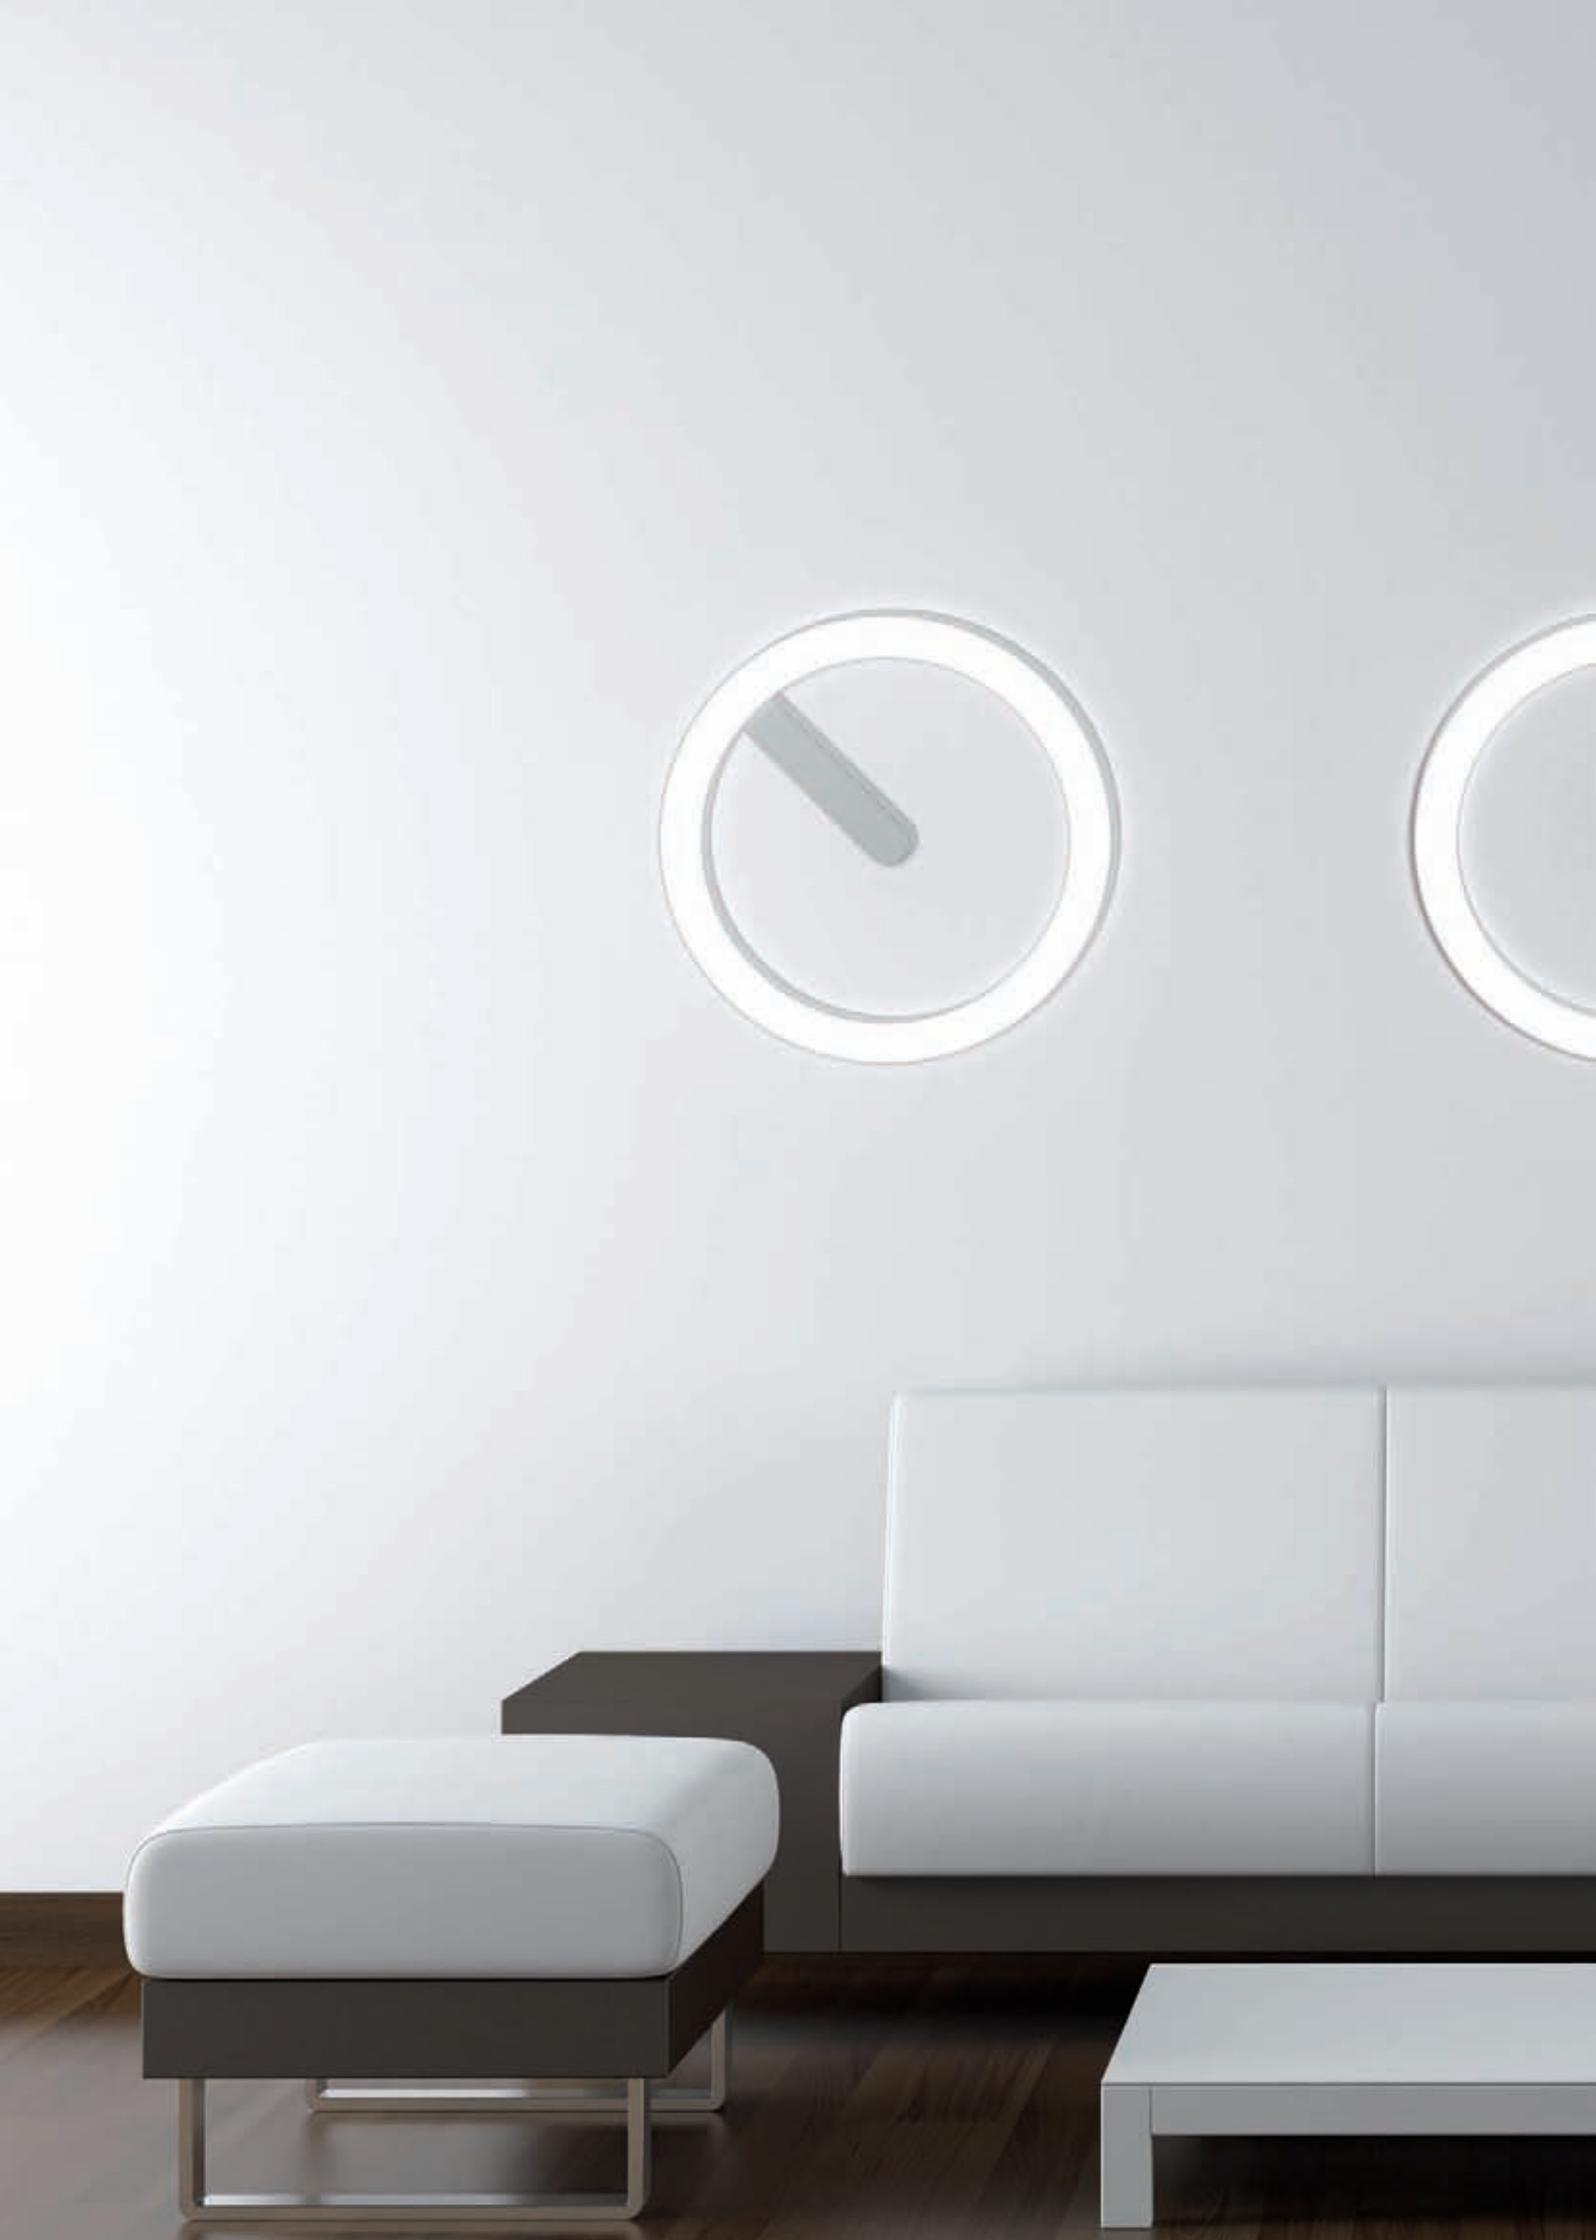







LED lighting, wall luminaire

- › luminaire housing made of aluminium and steel
- › surface powder-coated
- › cover available in acrylic opal or prismatic
- › completely closed luminaire
- › ready-to-connect wiring
- › LED COB array, L90/B10 – 50000 hrs

- › High Flux LED-Type 93
- › Ultra Flux LED-Type 94

| | | | Article | LED type | 3000 K | 4000 K | Power |
|------|---|---|---------|---|---------|---------|-------|
| H 51 |  |  | 41400. | 93 | 2070 lm | 2100 lm | 27 W |
| | | | | 94 | 2960 lm | 2990 lm | 39 W |
| | | | |  | | | |


Technical changes reserved and errors excepted!

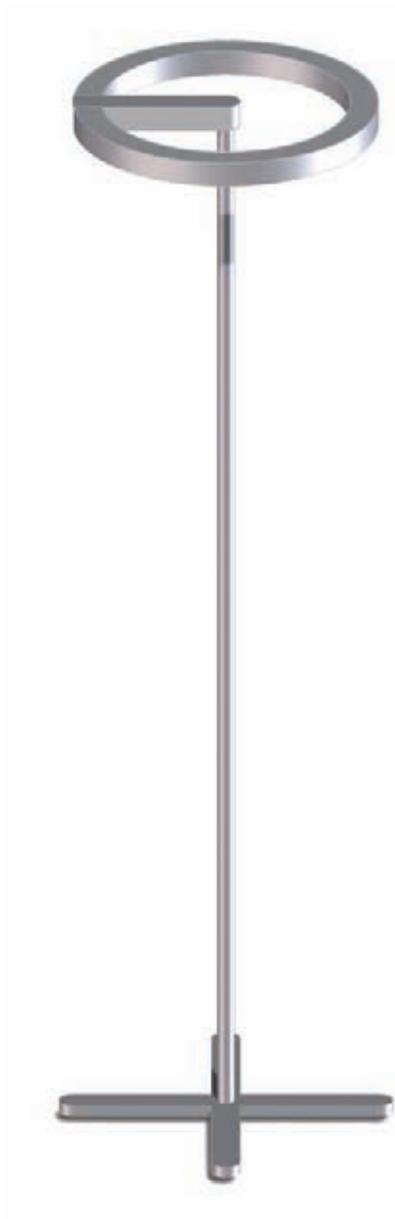

LED lighting, floorstanding upright

- › luminaire housing made of aluminium and steel
- › surface powder-coated
- › opal acrylic cover
- › completely closed luminaire
- › ready-to-connect wiring
- › LED COB array, L90/B10 – 50000 hrs

- › High Flux LED-Type 93
- › Ultra Flux LED-Type 94
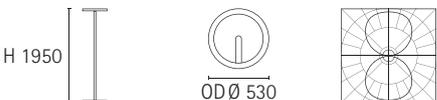
| | Article | LED type | 3000 K | 4000 K | Power |
|---|---------|----------|---------|---------|-------|
|  | 41410. | 93 | 2980 lm | 3040 lm | 35 W |
| | | 94 | 4150 lm | 4210 lm | 49 W |

Technical changes reserved and errors excepted!



LED lightring, pendant luminaire

- › direct or direct/indirect light emission
- › luminaire housing made of aluminium and steel
- › surface powder-coated
- › opal acrylic cover
- › completely closed luminaire
- › ready-to-connect wiring
- › LED COB-Array, L90/B10 – 50000 hrs

- › High Flux LED-Type 93
- › Ultra Flux LED-Type 94


| | Article | LED type | 3000 K | 4000 K | Power |
|---|---------|----------|---------|---------|-------|
| H 400  | 41420. | 93 | 2070 lm | 2100 lm | 27 W |
| | | 94 | 2960 lm | 2990 lm | 39 W |
| H 400  | 41421. | 93 | 2980 lm | 3040 lm | 35 W |
| | | 94 | 4150 lm | 4210 lm | 49 W |

Technical changes reserved and errors excepted!



LED lighting, pendant luminaire

- › direct or direct/indirect light emission
- › made of sharp-edged extruded aluminium sheath
- › surface powder-coated
- › opal acrylic cover
- › completely closed luminaire
- › ready-to-connect wiring
- › LED COB-Array, L90/B10 – 50000 hrs

| | | | Article | LED type | 3000 K | 4000 K | Power |
|--|--|---|---------|----------|----------|----------|-------|
| H 45  W 55 |  OD Ø 850 |  | 41450. | 93 | 3070 lm | 3080 lm | 47 W |
| | | | | 94 | 4280 lm | 4230 lm | 73 W |
| H 45  W 55 |  OD Ø 1200 |  | 41460. | 93 | 4330 lm | 4360 lm | 64 W |
| | | | | 94 | 6050 lm | 5970 lm | 102 W |
| H 45  W 55 |  OD Ø 1550 |  | 41470. | 93 | 5590 lm | 5630 lm | 82 W |
| | | | | 94 | 7810 lm | 7710 lm | 131 W |
| H 45  W 55 |  OD Ø 1900 |  | 41480. | 93 | 6860 lm | 6900 lm | 99 W |
| | | | | 94 | 9570 lm | 9460 lm | 159 W |
| H 45  W 55 |  OD Ø 850 |  | 41451. | 93 | 6140 lm | 6160 lm | 94 W |
| | | | | 94 | 8560 lm | 8460 lm | 146 W |
| H 45  W 55 |  OD Ø 1200 |  | 41461. | 93 | 8660 lm | 8720 lm | 128 W |
| | | | | 94 | 12100 lm | 11940 lm | 204 W |
| H 45  W 55 |  OD Ø 1550 |  | 41471. | 93 | 11180 lm | 11260 lm | 164 W |
| | | | | 94 | 15620 lm | 15420 lm | 262 W |
| H 45  W 55 |  OD Ø 1900 |  | 41481. | 93 | 13720 lm | 13800 lm | 198 W |
| | | | | 94 | 19140 lm | 18920 lm | 318 W |

Technical changes reserved and errors excepted!

| Art.-No. | Page | Art.-No. | Page | Art.-No. | Page | Art.-No. | Page |
|----------|------|----------|------|----------|------|----------|------|
| 01000. | 28 | 17513. | 57 | 17742. | 63 | 41451. | 139 |
| 01100. | 28 | 17514. | 57 | 17743. | 63 | 41460. | 139 |
| 01120. | 28 | 17515. | 57 | 17751. | 63 | 41461. | 139 |
| 01160. | 28 | 17522. | 57 | 17752. | 63 | 41470. | 139 |
| 01180. | 28 | 17523. | 57 | 17753. | 63 | 41471. | 139 |
| 01210. | 28 | 17524. | 57 | 17761. | 63 | 41480. | 139 |
| 01270. | 28 | 17525. | 57 | 17762. | 63 | 41481. | 139 |
| 01500. | 30 | 17552. | 59 | 17763. | 63 | 46000. | 28 |
| 01600. | 30 | 17553. | 59 | 17771. | 63 | 46100. | 28 |
| 01620. | 30 | 17554. | 59 | 17772. | 63 | 70103. | 121 |
| 01660. | 30 | 17555. | 59 | 17773. | 63 | 70104. | 121 |
| 01720. | 30 | 17562. | 59 | 17781. | 63 | 70105. | 121 |
| 01790. | 30 | 17563. | 59 | 17782. | 63 | 70106. | 121 |
| 01800. | 30 | 17564. | 59 | 17783. | 63 | 71100. | 123 |
| 01890. | 30 | 17565. | 59 | 17791. | 103 | 84432. | 99 |
| 01900. | 30 | 17600. | 61 | 17792. | 103 | 84433. | 99 |
| 08000. | 29 | 17601. | 61 | 17793. | 103 | 84434. | 99 |
| 08010. | 29 | 17610. | 61 | 17794. | 103 | 84435. | 99 |
| 08050. | 29 | 17620. | 64 | 17795. | 103 | 84412. | 99 |
| 08950. | 29 | 17621. | 65 | 17796. | 103 | 84413. | 99 |
| 08980. | 17 | 17630. | 64 | 18302. | 97 | 84414. | 99 |
| 09000. | 31 | 17640. | 61 | 18303. | 97 | 84415. | 99 |
| 09010. | 31 | 17650. | 61 | 18304. | 97 | 95612. | 95 |
| 09050. | 31 | 17660. | 61 | 18305. | 97 | 95613. | 95 |
| 09950. | 31 | 17670. | 61 | 18312. | 97 | 95614. | 95 |
| 10130. | 27 | 17680. | 101 | 18313. | 97 | 95615. | 95 |
| 10140. | 27 | 17690. | 101 | 18314. | 97 | 95622. | 95 |
| 10150. | 27 | 17703. | 65 | 18315. | 97 | 95623. | 95 |
| 10160. | 27 | 17705. | 65 | 28060. | 41 | 95624. | 95 |
| 10170. | 27 | 17711. | 62 | 28070. | 39 | 95625. | 95 |
| 10180. | 27 | 17712. | 62 | 28080. | 37 | 95632. | 93 |
| 12100. | 25 | 17713. | 62 | 28090. | 37 | 95633. | 93 |
| 12130. | 25 | 17714. | 62 | 28160. | 39 | 95634. | 93 |
| 12140. | 25 | 17715. | 62 | 28170. | 41 | 95635. | 93 |
| 12150. | 25 | 17716. | 62 | 41400. | 133 | 95642. | 93 |
| 12830. | 25 | 17731. | 63 | 41410. | 135 | 95643. | 93 |
| 12840. | 25 | 17732. | 63 | 41420. | 137 | 95644. | 93 |
| 17500. | 65 | 17733. | 63 | 41421. | 137 | 95645. | 93 |
| 17512. | 57 | 17741. | 63 | 41450. | 139 | 97200. | 125 |

Terms and Conditions

I.) General terms and conditions

1. All of our existing and future shipments and services, including secondary services such as consultancy and planning services prior to and after delivery, are based exclusively on these Terms and Conditions. The same shall apply to any adjustment services. These Terms and Conditions shall also apply to future business dealings irrespective of whether they are expressly mentioned or not.
2. The buyer's terms and conditions (also known as conditions for purchasing) are herewith expressly excluded. They are equally not binding even where we do not exclude them at the time of entering into a contract.
3. The conclusion of a purchase contract and the dimensions of the delivery obligations arising out of such a contract are governed by a corresponding declaration of intent by both contracting parties. Where such a declaration of intent is not available, a written order confirmation from the supplier shall be exclusively binding whereby the following terms and conditions shall be deemed agreed.

II.) Contractual Agreement

1. Written and oral offers and offers made by telephone are non-binding and subject to confirmation. Offers made do not oblige the supplier to accept an order.
2. Statements made by the supplier with regard to measurement and weight, as well as graphic representations, drawing and details of dimension and weight or similar provided by the supplier in documentation or descriptions are only approximate values and are therefore not binding. The documentation comprising the offer does not represent a guarantee of the product's properties but serves purely as orientation for the buyer.
3. A guarantee with regard to specific properties and/or the suitability of a product for a particular use shall only be binding where this is expressly stated as such in writing

III.) Price

1. The stated prices are ex works, including standard packaging. Changes with regard to despatch and packaging of goods require a separate agreement.
2. All prices include VAT at the rate applicable at the time of delivery. VAT will be added on to invoices at the applicable rate and will be shown separately. All other taxes, customs duty, charges or similar shall be borne by the buyer.
3. Until an order is confirmed by the supplier, prices quoted for special luminaires or special constructions shall be regarded as approximate prices. A "special luminaire" shall be defined as the constructional modification of an existing luminaire type and the making of same according to in-house drawings or those of the buyer. Spare parts and spare colours for special luminaires must be ordered separately by the buyer and will be invoiced by the supplier.
4. Unless otherwise agreed samples will only be delivered on the basis of an invoice with the value calculated in line with the price list. Samples may not be exchanged or returned. The cost of sample special luminaires shall be calculated on the basis of time and effort expended and invoiced accordingly.

IV.) Retention of Title

1. Until payment has been received in full, the supplied goods shall, even after sale, remain the property of the supplier. The supplier's right to

retention of title extends to products which have already been installed or have been sold on.

2. Any right to payment arising out of the resale of the goods by the buyer shall be ceded to the supplier who expressly accepts this assignment.
3. Where goods of the supplier have already been installed, the value of the supplier's goods resulting from the sale of the product/project by the buyer shall be ceded by the buyer to the supplier at the moment such sale takes place. Proportional title to the proceeds of the re-sold goods shall be transferred to the supplier when the buyer receives payment. Unpaid goods from the supplier may be neither pledged nor assigned by way of collateral. All demands arising out of the commercial relationship shall be immediately due and payable at the moment payment ceases and/or if the buyer should seek for settlement in bankruptcy or a moratorium.

V.) Payment

1. The supplier's invoices are to be paid in full 14 days after the date shown on the invoice at latest. Part deliveries shall be invoiced separately. Where payment is received within 8 days from the date shown on the invoice, the supplier shall grant a cash discount of 2%. The date of payment shall be the date on which the money is available to the supplier. Where outstanding payments are owed from previous invoices, cash discounts shall not be given.
2. The buyer shall be deemed in each and every case, and without any reminder being necessary, to be in arrears when 14 days have elapsed from the date of the invoice. In the event of arrears, interest at the usual bank rates for overdrafts shall be charged. In the event of the buyer being in arrears, the supplier may immediately demand settlement, including settlement of all invoices which would normally be due and payable at a later date, any other agreements notwithstanding.
3. Payment may not be withheld or offset by the buyer against any counter claims he may make which have not been acknowledged by the supplier.
4. Irrespective of any individually agreed conditions of payment, the supplier shall be entitled to demand immediate settlement should the buyer find himself in circumstances which make it unlikely that he will meet the agreed conditions of payment. This shall apply where there are well-founded indications of a significant worsening of the buyer's financial position, in particular in the event of suspended payments, cheque or draft refusals or arrears, where it is clear from these that the supplier's claim to payment is endangered by the buyer's insufficient ability to pay. In these instances the supplier is further entitled to demand payment in instalments or to demand further security.

VI.) Delivery

1. The observance of delivery deadlines presupposes the punctual receipt of all specifications, documentation, licences and releases, in particular of plans and drawings, from the buyer as well as the buyer's observance of agreed conditions of payment and any other obligations. Where these obligations are not met punctually, any delivery deadlines shall be extended accordingly, unless the supplier cannot answer for any delay. Transactions with fixed delivery dates require express written confirmation from an authorised person.
2. The delivery dates stated by the supplier are approximate and depend on the receipt of punctual and orderly delivery by his own suppliers. The supplier shall be liable for the observance of a delivery deadline

only where he has expressly given such an undertaking. Where these obligations are not punctually met, the delivery deadline shall be extended accordingly without making the supplier liable to pay compensation.

3. The transport risk shall be borne by the buyer, even where carriage free delivery has been agreed, once the goods have left the supplier's place of production. At the request of the buyer and at his expense, the goods may be insured by the supplier against loss caused by despatch, breakage, transport or fire.

VII.) Receipt and fulfilment

1. Delivered goods must be accepted by the buyer even where they show minor defects that do not interfere with the functioning of the product.
2. Part deliveries may be made.
3. The supplier's stated willingness to deliver the goods shall suffice as fulfilment of the delivery conditions.

VIII.) Guarantee and liability

1. Immediately on receipt of any delivery, the buyer shall inspect the shipment thoroughly and fully. Defects or malfunctions noted on inspection must be reported in writing within 8 days. Where a defect which was not visible immediately becomes apparent later, the buyer must notify the supplier of this without delay in writing.
2. The guarantee is for 12 months from the transfer of risk and applies to guaranteed properties and the flawlessness of the goods with regard to material and processing, in accordance with the latest state of technology. The only guarantee for any illuminants delivered shall be the guarantee of the respective illuminant manufacturer. Illuminants may not be exchanged or replaced.
3. The guarantee only applies if a defect appears despite proper and correct installation, operation, care, maintenance and normal use in keeping with any existing operation instructions and where the defect is not due to natural wear and tear, the corrosion of individual parts, improper repairs or alterations. The guarantee shall not apply in the event of minor discrepancies with regard to colour, dimensions and/or other external properties.
4. Where justified and properly reported complaints have been made, the supplier undertakes to either remove the defect or to exchange the faulty part within a suitable period of time, whichever he deems fit. The supplier shall not bear the cost of installation.
5. The buyer does not have the right to cancel the contract or to reduce the agreed price unless the supplier refuses to remove the defect or replace the goods or has not responded to a justified complaint within a suitable period of at least 4 weeks. The contract may only be cancelled if the buyer cannot be expected to accept the goods at a reduced price.
6. Claims, irrespective of their legal basis, will be entertained only in the case of § 11, No. 7 AGBG (gross negligence), § 11, No. 8(b) AGBG (default and impracticality, caused by our gross negligence), § 11, No. 9 AGBG (buyer's loss of interest in the event of partial default and partial impracticality, but only where these are caused by the gross negligence of the supplier) and for grossly negligent claims with regard to the properties of the products. Moreover claims will be entertained which relate to so-called direct and/or consequential loss, where this was foreseeable by the supplier at the time the contract was concluded and he was aware of such at the time of giving any undertakings.

IX.) Place of delivery and jurisdiction

1. The place of delivery for all deliveries and payments including return deliveries shall be Dortmund.
2. The sole jurisdiction for all disputes arising directly or indirectly out of the contract shall be the place in which the supplier has his head office.
3. German law shall apply in relation to this contract, to the exclusion of the UN Convention on Contracts for the International Sale of Goods.


X.) Miscellaneous

1. The supplier reserves his right to use quotations, drawings and other documentation (hereinafter referred to as "documentation") as the owner and originator thereof. This documentation may only be transmitted to third parties with the prior approval of the supplier and, if no order is placed with the supplier, must be returned on demand without delay. Sentences 1 and 2 apply equally to the buyer's documentation: this may however be made available to third parties whom the supplier has rightfully commissioned to carry out deliveries.
2. Where one of the provisions of these terms and conditions or a provision in some other agreement is or shall become invalid, this does not affect the validity of the remaining provisions or agreements.

Key to Article Numbers

The article number fundamentally has six parts. The number starts with the desired luminaire type (1) and continues with the LED type (2), colour temp. (3), driver (4), surface colour (5) and reflector (6).

12280-16-30-02-32-M

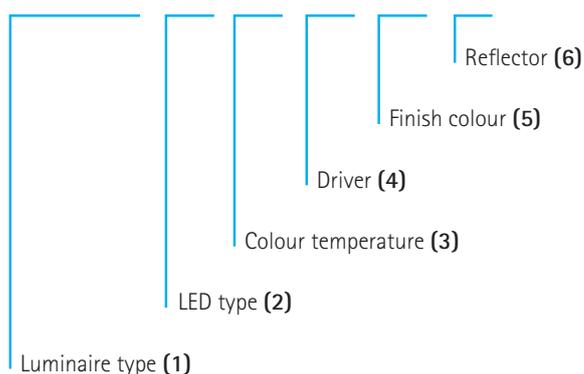

(2) LED type order code

| | |
|----|---------------------------------|
| 0x | Linear |
| 1x | High Efficiency (CRI > 82) |
| 2x | High Performance (CRI > 90) |
| 3x | Gallery (CRI > 97) |
| 4x | Retail (CRI > 85) |
| 5x | Retail (CRI > 95) |
| 6x | Below Black Body (CRI > 90 BBL) |

(3) Colour temp. order code

| | |
|----|--------|
| 27 | 2700 K |
| 30 | 3000 K |
| 31 | 3100 K |
| 35 | 3500 K |
| 40 | 4000 K |
| 56 | 5600 K |

(4) Driver order code

| | |
|----|-------------------------|
| 00 | Without driver |
| 01 | Low-loss driver |
| 02 | Electronic driver |
| 03 | Dimmable ECG, 1-10 volt |
| 04 | dual switch |
| 05 | dual dimm |
| 06 | Emergency light, E14 |
| 07 | Single battery, 1 hour |
| 08 | Single battery, 3 hour |
| 09 | Mains/battery switch |
| 10 | Dimmable ECG, DALI |
| 11 | Dual Dimm DALI |
| 14 | dimnable ECG phase |
| 15 | DMX |
| 16 | direct dimm |

(5) Finish colour order code

| | |
|----|---|
| 10 | Brass |
| 11 | Chrome |
| 12 | Matt chrome |
| 13 | Aluminium scotched & varnished |
| 14 | Anodized aluminium |
| 18 | Stainless steel, brushed |
| 20 | Made to RAL |
| 23 | Luna-silver |
| 25 | Titanium silver |
| 26 | To RAL 9006 |
| 27 | To RAL 9007 |
| 30 | Matt black |
| 31 | White |
| 32 | Matt white |
| 66 | Ceiling frame black + housing/light trap black |
| 67 | Ceiling frame titanium + housing/light trap black |

(6) Reflector order code

| | |
|----|-------------|
| XS | Super-Spot |
| S | Spot |
| M | Medium |
| XM | Medium wide |
| F | Flood |
| XF | Super-Flood |